



Amoco Production Company

ENGINEERING CHART

SHEET NO.

OF

FILE

APPN

DATE

10/16/75

BY


WLL

SUBJECT

HONDO FED GAS Com #2

LOGAN DRAW - MORROW, EDDY Co, N.M.

RDB = 3488'

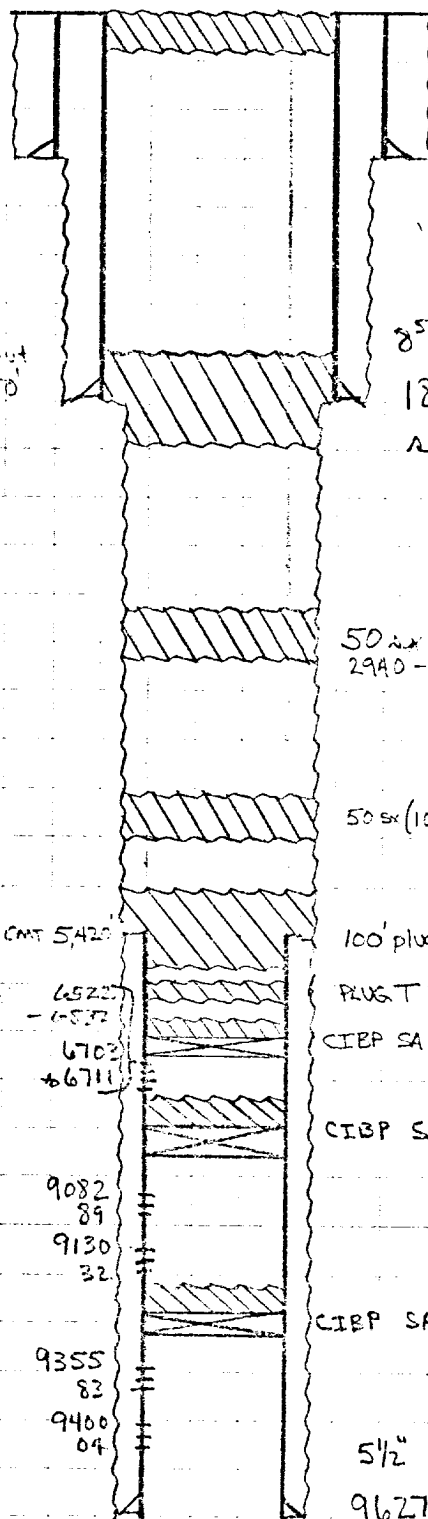

10 AX cmt plug to surface w/Perf marker

20" CONDUCTOR PIPE SA 30', CIRCUM.

50 ax (100') plug in & out
of csg shoe, 1850-1750

8 5/8" 24-32# H-40-K-55 CSA
1800' w/625 ax TLW x 7# st x 200
ax CL.C. in 120 ax

50 ax (100') cut plug across Top of Glorieta,
2940-2840.

50 ax (100') plug across ARO, 5060'-4950'.

TOP OF CMT 5420

PERF WOLF w/2 JSPF 1/2" / 3000 GAL
PERF WOLF CAMP w/2 JSPF. ACD
w/3000 gal 15% LSTNE.

6520
6532
6702
6671

100' plug 50' in x 50' OUT OF Csg. shoe. (35 ax)

PLUG T WOLF. w/25 ax cut plug from 6100-5850
CIBP SA 6480'. CAP w/35' CMT.

PERF ATOKA w/2 JSPF. ACD
w/3000 gal 7 1/2% DRY.

9082
89
9130
32

CIBP SA 8930' w/40' CMT. PER = 8890'

PERF MORROW w/2 JSPF
ACD w/7000 gal 7 1/2% DRY.

9355
83
9400
04

5 1/2" 14-17# J-55 & K-55 CSA
9627' w/1200 ax CL H w/5%
CFR-2.

RECEIVED
OCT 21 1975
U.S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICO