


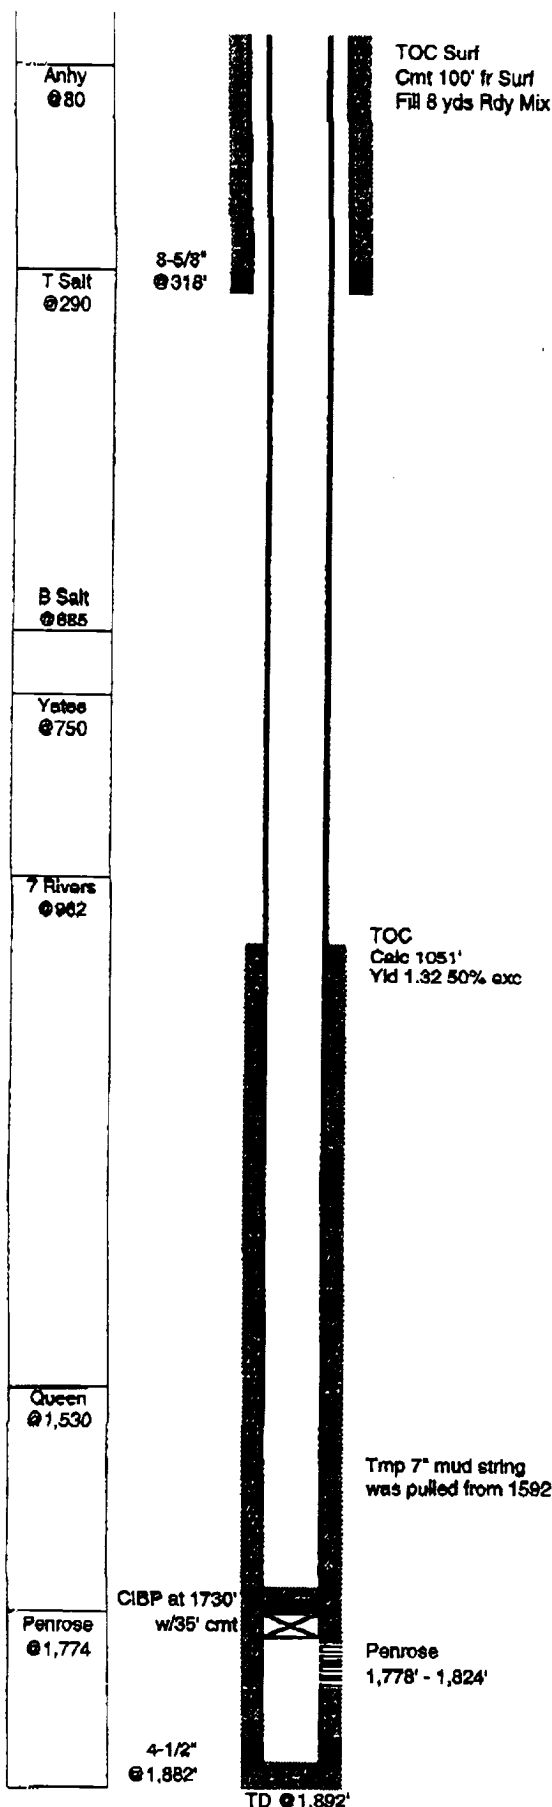

RLU #24

GL: 3,697
KB: 3,699
TD: 1,892
PBD:
Fr. Wtr: 250
Legal: 1,983 from E
1,986 from N
Section: 36-G
Township: 16S
Range: 28E
County: Eddy

Status: Inactive Injector
Perfs: 1,778' - 1,824'
API: 30-015-23658
NM Lee:
Field: Red Lake East (Qn Grybrg)
Logs: GR, Neu
Archeological:

Casing	WT	Type	Set	Cmt	Hole	TOC	Method
8-5/8"	20.00		318	300	11"	100	Top 8yd Rdy Mix
7"	20.00		1,592	NONE	8"	Temp Mud	String Pulled
4-1/2"	11.60	ST&C	1,882	175	6"	1,051	Calc yld 1.32 50% excess

12-Mar-82 Spud well
Beach - New Mexico State 35 #5

Penrose Completion

3-Aug-82 Perf: 1778,79,80,81,82,83,88,89,90,1820,21,22,23,24 (1778-1824) 14 holes
Acid w/1000gal 15% HCL & 28 balls, frac w/17Mgal Gel KCL 14M# 20/40 +
6.5M# 10/20 sd

9-Aug-82 Officall Potential: Pump 5.6 BO, 1 BW, 6.2 MCF, 34.6 API oil

14-May-91 Converted to water injection well RLU #24

19-Jan-98 Pulled tbg & pkr from hole. Tbg went to #12

28-Apr-00 REAL Well Service - PU 53 jts tbg & pkr RIH, set pkr test csg. OK. Pull LD tbg
Conducted MIT 400 psi 30 min

RLU #24 TA Procedure

- 1 POOH w/tubing
- 2 RU Wireline, RIH w/gauge ring, POOH
- 3 RIH w/WL set CIBP, set at 1730', POOH
- 4 RIH w/bailer and dump 35' cmt on CIBP
- 5 Load hole and conduct MIT w/OCD and file for TA'd Status

TUBING STRING 5/14/01

# OF JTS	DESCRIPTION	LENGTH	FROM	TO
	Distance from KB to top of pipe	2.00	0.00	2.00

ROD STRING

# OF JTS	SIZE	TYPE OF RODS	LENGTH
----------	------	--------------	--------