

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill on, to deepen or plug back to a different reservoir. Use Form 9-331-C for such proposals.)

1. oil ☒ well gas ☐ well other ☐  
2. NAME OF OPERATOR Yates Drilling Company  
3. ADDRESS OF OPERATOR 207 South 4th St., Artesia, NM 88210  
4. LOCATION OF WELL (REPORT LOCATION CLEARLY. See space 17 below.)  
AT SURFACE: 1980 FNL & 1995 FWL, Sec. 20-17S-27E  
AT TOP PROD. INTERVAL:  
AT TOTAL DEPTH:

16. CHECK APPROPRIATE BOX TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

REQUEST FOR APPROVAL TO: SUBSEQUENT REPORT OF:  
TEST WATER SHUT-OFF ☐ ☐  
FRACTURE TREAT ☐ ☐  
SHOOT OR ACIDIZE ☐ ☒  
REPAIR WELL ☐ ☐  
PULL OR ALTER CASING ☐ ☐  
MULTIPLE COMPLETE ☐ ☐  
CHANGE ZONES ☐ ☒  
ABANDON\* ☐ ☐  
(other) ☐ ☐

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

TD 3111'. Pulled rods & tubing. Set retainer at 2768'. Squeezed perforations 2799-2928' w/100 sks Class "C" cement. WIH & perforated 2711-16' w/5 .50" holes. Treated perms 2711-16' w/500 gals 15% MCA. Swabbed well. Pulled tubing and packer. WIH and perforated 1757-1839' w/11 .50" holes as follows: 1757, 65, 95, 97, 1805, 12, 27, 29, 34, 37, and 39'. Set RBP at 1890'. Acidized w/2000 gals 15% acid and 7 ball sealers. Well producing from 1757-1839' San Andres.

Subsurface Safety Valve: Manu. and Type \_\_\_\_\_ Set @ \_\_\_\_\_ Ft.

18. I hereby certify that the foregoing is true and correct

SIGNED \_\_\_\_\_ TITLE Engineering Secty DATE 11-1-82

ACCEPTED FOR RECORD

(ORIG. SGD.) DAVID R. GLASS

APPROVED BY \_\_\_\_\_ DATE NOV 4 1982

U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO

\*See Instructions on Reverse Side


5. LEASE NM 32585  
6. IF INDIAN, ALLOTTEE OR TRIBE NAME  
7. UNIT AGREEMENT NAME NOV 8 1982  
8. FARM OR LEASE NAME O. C. D.  
Logan Draw-Yeso OT Federal ARTESIA, OFFICE  
9. WELL NO. 1  
10. FIELD OR WILDCAT NAME Wildcat  
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA  
Unit F, Sec. 20-T17S-R27E  
12. COUNTY OR PARISH Eddy 13. STATE NM  
14. API NO.  
15. ELEVATIONS (SHOW DF, KDB, AND WD) 3374' GR

(NOTE: Report results of multiple completion or zone change on Form 9-330.)

NM OIL CONS. COMMISSION  
Drawer DD  
Artesia, NM 88210

RECEIVED

NOV 5 1982

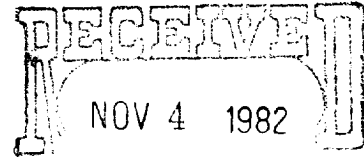

DRILL STEM TESTS

Yates Petroleum Corporation  
Logan Draw Yeso "OT" Federal #1-Y, NM 32585  
~~1980~~ ~~1980~~ FNL & ~~1980~~ FWL, Unit F, Sec. 20-17S-28E  
Eddy County, New Mexico

OIL & GAS  
U.S. GEOLOGICAL SURVEY  
ROSWELL, NEW MEXICO

DST #1 - 2670-2750'. TO 30"; SI 60"; TO 60"; SI 120". Tool opened w/slight blow and died. No GTS. Recovery: 120' of drilling fluid and formation fluid (mixed). Sampler: 0 psi, 0 fluid, Pressures: HP 1222-1209; IFP 53-66; FSIP 1196; FFP 92-119; FSIP 1196. BHT: 92 degrees F.