

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division
111 S. 1st Street
Artesia, NM 88210-2834

FORM APPROVED
Budget Bureau No. 1004-0135
Expires March 31, 1993
Case Designation and Serial No.

NM-26689

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1 Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2 Name of Operator

Mack Energy Corporation

3 Address and Telephone No.

P.O. Box 960, Artesia, NM 88211-0960 (505)748-1288

4 Location of Well (Footage, Sec., T. R., M. or Survey Description)

Sec. 21-T16S-R31E 1980 FNL & 1980 FEL

6 If Indian, Allottee or Tribe Name

7 If Unit or CA, Agreement Designation

8 Well Name and No.

Superior #1

9 API Well No.

30-015-24729

10 Field and Pool, or Exploratory Area

Square Lake Grayburg SA

11 County or Parish, State

Eddy, NM

12 CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other _____
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13 Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work)*

* → Spot 50' cmt. cap on CIBP at 3308'
Mack Energy Corporation proposes to plug and abandon as follows:


(1) Spot 25sx Plug @ 3100, Tag @ 3000'

(2) Spot 25sx plug @ 1850-1750 (Base Salt) TAG 00'

(3) Perf Casing @ 700'. Squeeze 30sx balance cmt plug 100' inside and out 5 1/2" Casing. Tag plug @ 600'.

(4) Spot 50' Surface plug

(5) Install Dry Hole Marker and clean location.

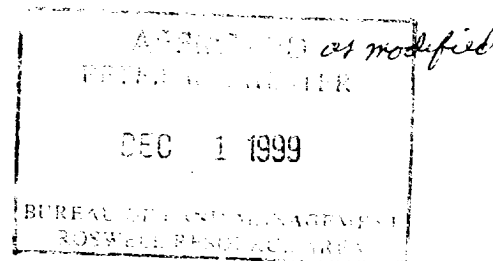

14. I hereby certify that the foregoing is true and correct

Signed

Missa S. Cant

Title

Production Analyst

Date

11/17/99

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title


Date

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

•See Instruction on Reverse Side

MACK ENERGY CORPORATION
SUPERIOR FED. #1
S21 T16S R31E 1980FNL 1980FEL

Before P&A

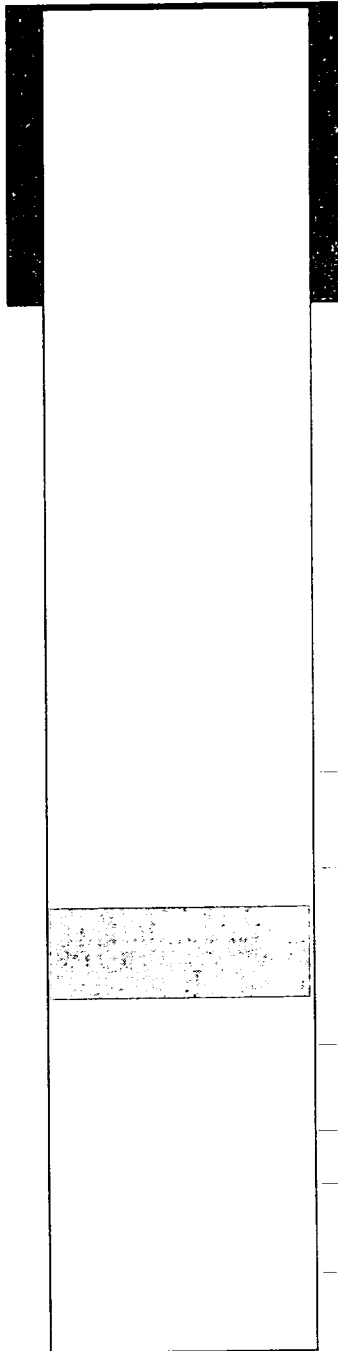

8 5/8" 24# 650' C/W 300SX CIRC.

TOC BY BOND LOG 1640'

Perfs 3110-24

CIBP @ 3308

Perfs 3528-48


Perfs 4051-4118

5 1/2" 17# 4100' C/W 800SX

TD 4100'

MACK ENER CORPORATION
SUPERIOR FED. #1
S21 T16S R31E 1980FNL 1980FEL

AFTER P&A

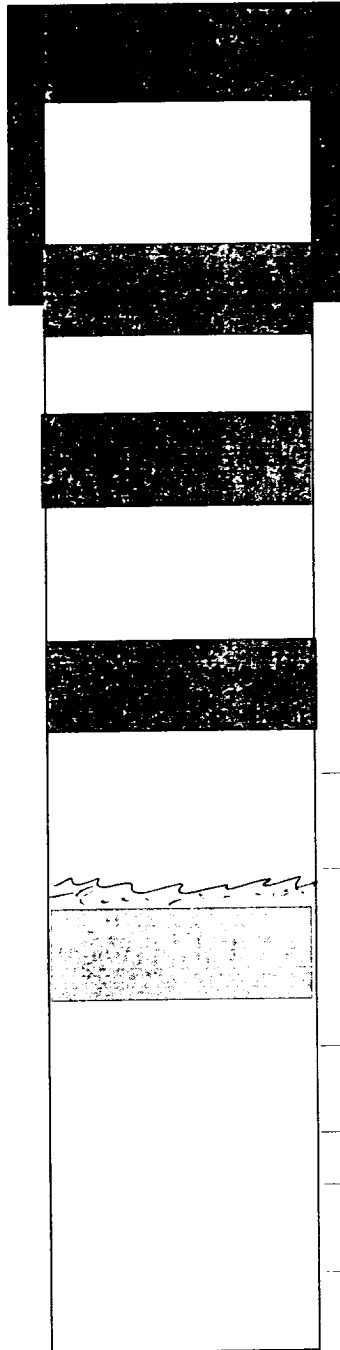

Surface Plug

8 5/8" 24# 650' C/W 300SX CIRC.

Perf Casing @ 700 and Squeeze w/50sx Tag Plug @ 600'

TOC BY BOND LOG 1640'

Spot 100' Plug 1850-1750 (base Salt)

Spot 100' Plug @3100-3000

Perfs 3110-24

CIBP @ 3308

Perfs 3528-48

Perfs 4051-4118

5 1/2" 17# 4100' C/W 800SX

TD 4100'

10/17

RECEIVED
NOV 18 98
BLM
CROWELL, NM