

STATE OF NEW MEXICO
ENERGY AND MINERALS DEPARTMENT


NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	<input checked="" type="checkbox"/>
FILE	<input checked="" type="checkbox"/>
U.S.G.S.	
LAND OFFICE	
OPERATOR	<input checked="" type="checkbox"/>

OIL CONSERVATION DIVISION

P. O. BOX 2088

SANTA FE, NEW MEXICO 87501

Form C-103
Revised 10-1-

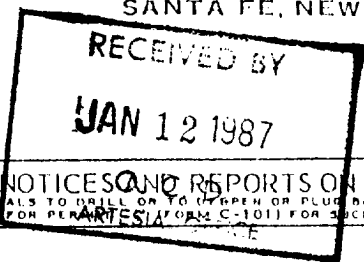

5a. Indicate Type of Lease
State ☒ Federal ☐
5. State Oil & Gas Lease No.
B-1111

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO OPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE APPLICATION FOR PERMITS (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL <input checked="" type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input type="checkbox"/>	7. Unit Agreement Name
2. Name of Operator RED LAKE OIL COMPANY	8. Name of Lease Name WELCH STATE
3. Address of Operator P.O. Box 742341, Houston, Texas 77274-2341	9. Well No. 1
4. Location of Well UNIT LETTER j, 1,750 FEET FROM THE South LINE AND 1,650 FEET FROM THE East LINE, SECTION 28 TOWNSHIP 17S RANGE 28E NMPM.	10. Field and Pool, or Wildcat Und.E.EmpireY. SR
15. Elevation (Show whether DF, RT, GR, etc.) 3,684' GL	12. County Eddy

Check Appropriate Box To Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

SUBSEQUENT REPORT OF:

PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input checked="" type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input checked="" type="checkbox"/>	PLUG AND ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	OTHER <input type="checkbox"/>	CASING TEST AND CEMENT JOBS <input type="checkbox"/>	

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

TD at 850'. Ran 842' of 5½", 15.50#, J-55, LTC. Casing in place at 0330 hrs 1/1/87. Rig up Halliburton and cement with 200 sacks Class c, 50/50 Pazmix, with 8# Salt and ¼# Floseal per Barrel. Full returns and 10 sacks to pit. Bumped plug with 20 barrels of fresh water and pressured with 600 psi. Pressure held with no leak-off. Cement in place at 0415 hrs 1/1/87.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNED Van P. Welch TITLE President DATE 1/9/87

APPROVED BY Original Signed By Leslie A. Clement TITLE Supervisor District II DATE JAN 12 1987

CONDITIONS OF APPROVAL, IF ANY: