

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE

(See other instructions on reverse side)

FORM APPROVED

311 S. 1st Street

5. LEASE, DESIGNATION AND SERIAL NO.
NM-055739319, NM 80077

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME, WELL NO.

Eagle "34H" Federal #15

9. LAND MGMT. OFFICE

10. FIELD AND POOL, OR WILDCAT

Red Lake (Q-GB-SA)

11. SEC., T., R., M., OR BLOCK AND SURVEY OR AREA
"H" Section 34-17S-27E

WELL COMPLETION OR RECOMPLETION REPORT AND LOG

1a. TYPE OF WELL: OIL WELL ☒ GAS WELL ☐ DRY ☐ Other _____

b. TYPE OF COMPLETION:

NEW WELL ☒ WORK OVER ☐ DEEP-EN ☐ PLUG BACK ☐ DIFF. RESVR ☐ Other _____

2. NAME OF OPERATOR

DEVON ENERGY CORPORATION (NEVADA)

3. ADDRESS AND TELEPHONE NO.

20 N. BROADWAY, SUITE 1500, OKC, OK 73102-8260 (405) 235-3611

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)*

At surface 1650' FNL & 790' FEL Unit "H"

At top prod. interval reported below (SAME)

At total depth (SAME)

ACCEPTED FOR RECORD MAY 10 1997

MAY 14 1997

14. PERMIT NO.

DATE ISSUED

8/15/96

12. COUNTY OR PARISH

Eddy County

13. STATE

NM

15. DATE SPUDDED

3/10/97

16. DATE T.D. REACHED

3/16/97

17. DATE COMPL.

3/30/97

(Ready to prod.)

18. ELEVATIONS (DF, RKB, RT, GR, ETC.)*

KB 3570'; GL 3561'; DF 3569'

19. ELEV. CASINGHEAD

20. TOTAL DEPTH, MD & TVD

2750'

21. PLUG, BACK T.D., MD & TVD

2695'

22. IF MULTIPLE COMPL., HOW MANY*

NA

23. INTERVALS

DRILLED BY

ROTARY TOOLS

X

CABLE TOOLS

24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)*

San Andres - 1907-2382'

25. WAS DIRECTIONAL SURVEY

MADE

No

26. TYPE ELECTRIC AND OTHER LOGS RUN

LDT/CNL/DLL/MSFL/GR; CBL

27. WAS WELL CORED

No

28. CASING RECORD (Report all strings set in well)

CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
8-5/8" J-55	24#	1087'	12-1/4"	surf; 300 sxs lite & 200 sxs "C"	NA
5-1/2" J-55	15.5#	2749'	7-7/8"	surf; 200 sxs lite C & 250 sxs "C"	NA

29. LINER RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2-7/8"	2195'	(OET)

31. PERFORATION RECORD (Interval, size and number)

1907-2015' ALPHA (7 - .40" EHD holes)

2073-2138' "A" (6 - .40" EHD holes)

2182-2275' "B" (8 - .40" EHD holes)

2291-2311' "C" (2 - .40" EHD holes)

2324-2382' "D" (8 - .40" EHD holes)

32. ACID SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
1907-2382'	2500 gals of 15% NeFe acid
1907-2382'	180,000 gals gel water + 6000# 100 mesh
	sand + 116,000# 20/40 Brady sand and
	128,000# 16/30 Brady Sand

33.* PRODUCTION

DATE FIRST PRODUCTION 4/9/97		PRODUCTIONS METHOD I (Flowing, gas lift, pumping—size and type of pump) Pumping (2-1/2" x 2" x 12' RWTC Pump)						WELL STATUS (Producing or shut-in) Producing	
DATE OF TEST 4/19/97	HOURS TESTED 24	CHOKE SIZE	PROD'N FOR TEST PERIOD →	OIL-BBL. 49	GAS-MCF. 65	WATER-BBL. 294	GAS-OIL RATIO 1300/1		
FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE →	OIL-BBL. 49	GAS-MCF. 65	WATER-BBL. 294	OIL GRAVITY-API (CORR.) 38			

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)

Vented (To be connected)

TEST WITNESSED BY

Danny Hokett

35. LIST OF ATTACHMENTS

Logs, Deviation Surveys

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED Diana Keys

TITLE ENGINEERING TECHNICIAN

DATE May 5, 1997

*(See Instructions and Spaces for Additional Data on Reverse Side)

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill stem, tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):				38. GEOLOGIC MARKERS		
FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	MEAS. DEPTH	TRUE VERT. DEPTH
Premier Sand	1561'	1585'	sandstone dolomite	Bowers	662'	+2908
San Andres	1585'	2750'		Queen	853'	+2717
				Grayburg	1124'	+2446
				Premier	1561'	+2009
				San Andres	1585'	+1985
			DEPTH	ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.. (continued from the front)		
			NA			

RECEIVED

1997 MAY -8 P 9 31

BUREAU OF LAND MGMT.
ROSWELL OFFICE

L & M DRILLING, INC.

OIL WELL DRILLING CONTRACTORS
PO BOX 1370 ARTESIA, NEW MEXICO 88211-1370
(505) 746-4405 746-3518 748-2205

RECEIVED

1997 MAY -8 P 9 30

March 18, 1997

BUREAU OF LAND MGMT.
ROSWELL OFFICE

Devon Energy Corporation
20 North Broadway, Suite 1500
Oklahoma City, OK 73102-8260

RE: Eagle 34H Federal #15
650' FNL & 790' FEL
Sec. 34, T17S, R27E
Eddy County, New Mexico

Gentlemen:

The following is a Deviation Survey for the above captioned well.


DEPTH	DEVIATION
173'	1/2°
325'	1/2°
508'	1/2°
707'	1/2°
886'	3/4°
1076'	1°
1640'	1 1/2°
1935'	1 3/4°
2366'	2°
2750'	1 1/4°


Very truly yours,


Eddie C. LaRue
Vice President

STATE OF NEW MEXICO
COUNTY OF EDDY

The foregoing was acknowledged before me
this 18th day of March, 1997.


Notary Public

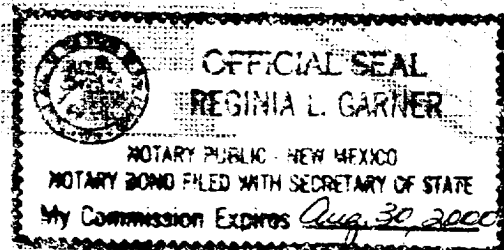

SERVING SOUTHEAST NEW MEXICO AND WEST TEXAS SINCE 1978