

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division
811 S. 1st Street
Artesia, NM 88210-2834

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELL

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

YATES PETROLEUM CORPORATION

(505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

660' FSL & 1980' FWL of Section 28-T16S-R27E (Unit N, SESW)

5. Lease Designation and Serial No.

NM-101585

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Lucky Strike AST Fed Com

9. API Well No.

30-015-30765

10. Field and Pool, or Exploratory Area

Crow Flats Morrow, NW

11. County or Parish, State

Eddy Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION


☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Resume drilling, surface casing & cement
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Resumed drilling a 12-1/4" hole with rotary tools at 11:45 AM 10-20-99.

TD 1344'. Reached TD at 7:45 PM 10-21-99. Ran 30 joints of 8-5/8" 24# 8rd J-55 ST&C (1347.84') of casing set at 1344'. 1-Texas Pattern notched guide shoe set at 1344'. Insert float set at 1344'. Cemented with 650 sacks 65-35-6, 1/4#/sack celloseal, 5#/sack gilsonite and 5#/sack salt (yield 2.04, weight 12.5). Tailed in with 200 sacks "C" and 2% CaCl2 (yield 1.34, weight 14.8). PD 3:15 AM 10-22-99. Bumped plug to 900 psi, OK. Circulated 250 sacks. WOC. Nipped up and tested to 3000 psi for 10 minutes. Drilled out at 2:30 PM 10-23-99. WOC 35 hours and 15 minutes. Reduced hole to 7-7/8". Resumed drilling. NOTE: Notified Cathy Queen w/BLM-Carlsbad of cementing.

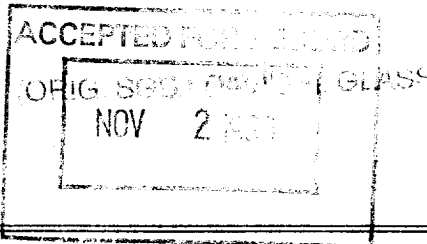

14. I hereby certify that the foregoing is true and correct

Signed Rusty Allen Title Operations Technician Date Oct. 29, 1999

(This space for Federal or State office use)

Approved by _____ Title _____ Date _____
Conditions of approval, if any:

RECEIVED
NOV 02 1995
U.S. DEPT. OF JUSTICE