

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYIN THE U.S. GEOLOGICAL SURVEY
SUBMIT IN TRIPLICATE
(Other instructions on reverse side)Form approved.
Budget Bureau No. 42 R1424
5. LEASE DESIGNATION AND SERIAL NO.
LC-028793-a
6. IF INDIAN, ALLOTTEE OR TRIBE NAME

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☐ OTHER ☒ Water Injection	7. UNIT AGREEMENT NAME
2. NAME OF OPERATOR General American Oil Company of Texas	8. FARM OR LEASE NAME Burch "A"
3. ADDRESS OF OPERATOR P. O. Box 128, Loco Hills, N. M. 88255	9. WELL NO. 23
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 2565' FNL & 955' FWL	10. FIELD AND POOL, OR WILDCAT Grayburg - Jackson
14. PERMIT NO.	15. ELEVATIONS (Show whether DF, RT, OR, etc.) 3627' DF
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 19, T-17S, R-30E	12. COUNTY OR PARISH Eddy
	13. STATE New Mexico

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETE

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANN

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

REPAIRING WELL

FRACTURE TREATMENT

ALTERING CASING

SHOOTING OR ACIDIZING

ABANDONMENT*

(Other)

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

DATA: 8 5/8" Casing cemented @ 455' with 75 sacks.
7" Casing cemented @ 2497' with 100 sacks.

We propose to plug and abandon the well as follows:

1. Set 125 sack cement plug from 3150' - 2447', to cover open hole section.
2. Run casing stretch survey to determine where 7" is free.
3. Shoot off casing at free point and pull.
4. Set 100' plug over casing stub (50' in and 50' out).
5. Set 100' plug from 925' - 825', (Base of Salt 875').
6. Top of Salt (430') is covered by pipe and cement.
7. Top of the water zone (293') is covered by pipe and cement. Calculated top of cement behind 8 5/8" is 212'.
X
(over)

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE

Engineer

DATE

4-29-81

(This space for Federal or State office use)

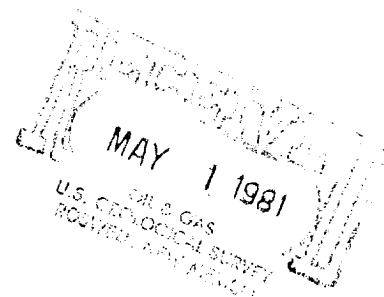
APPROVED BY (Orig. Sgd.) PETER W. CHESTER
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

FOR
JAMES A. GILLHAM
DISTRICT SUPERVISOR

See Instructions on Reverse Side

* 100' cement plug, 50' in & out
of 8 5/8" casing shoe.

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.

GPO 680-379

8. Set 10 sack surface plug.
9. Install permanent marker.