


DEVON ENERGY CORPORATION WELLBORE SCHEMATIC

WELL NAME: H. E. WEST "B" #6		FIELD: GRAYBURG JACKSON	
LOCATION: 2005' FNL & 660' FWL, SEC 4-T17S-R31E		COUNTY: EDDY COUNTY	STATE: NM
ELEVATION: GL=3937'; KB=UNK		SPUD DATE: 03/10/51	COMP DATE: 05/10/51
API #: 30-015-05070	PREPARED BY: C.H. CARLETON		DATE: 01/26/99

	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0' - 674'	10 3/4"	32.75#			13"
CASING:	0' - 3124'	7"	26#	J-55		10"
CASING:	3008' - 3519'	4 1/2"				6 1/8"
TUBING:	0' - 3062'	2 3/8"	4.7#	J-55	EUE 8rd	
TUBING:						

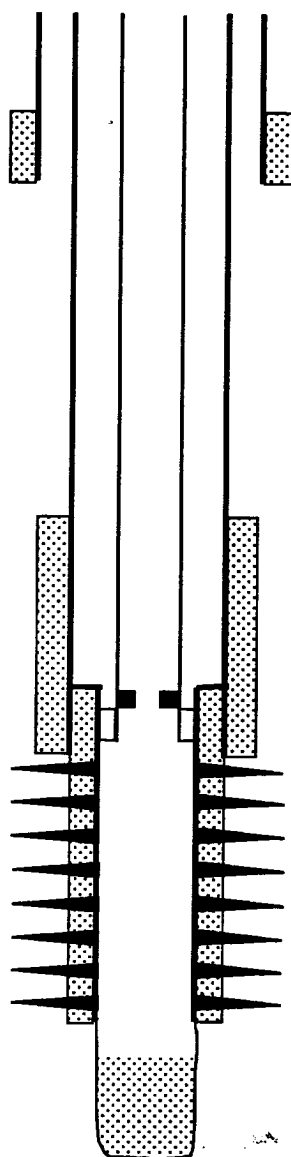

☒ CURRENT
 ☐ PROPOSED

OPERATOR: DEVON ENERGY CORPORATION (NEVADA)

10 3/4" CASING @ 674' W/100 SXS. TOC @ 450'(calculated)

DETAIL OF PERFORATIONS

GRAYBURG: 3126'

U.GRAYBURG: 3161', 3194'-3200'(2 SPF)

M.GRAYBURG: 3228'

LOCO HILLS: 3245'-3253'(2 SPF)

METEX: 3282'-3292'(2 SPF), 3302'-3310'(2 SPF)

L.GRAYBURG: 3343', 44', 54', 56', 58', 68'

PREMIER: 3385', 88', 90', 3405', 10', 14'

VACUUM: 3436', 56', 57', 58', 60', 94'

LOVINGTON: 3518, 20', 22', 24'

SEAT NIPPLE @ 3062'

BAKER AD-1 PACKER @ 3063'

7" CASING @ 3124' W/200 SXS. TOC @ 2650'(calculated)

PERFORATIONS: 3126'- 3524' (OA) - 69 HOLES

4 1/2" LINER @ 3008'- 3519' W/273 SXS.

3 7/8" OPEN HOLE: 3520'- 3600' (LOVINGTON INTERVAL)

PBTD @ 3600'

TD @ 3876'

NOTE: FOR CALCULATED CEMENT TOPS A YIELD OF 1.32 CU FT/SX AND 50% FILLUP WERE ASSUMED.