

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENTNM OIL CO. COMMISSION  
Drawer DD  
Artesia, NM 88210FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

## SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals.

SUBMIT IN TRIPLICATE

MAY 03 1993

## 1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

## 2. Name of Operator

SOCORRO PETROLEUM COMPANY ✓

## 3. Address and Telephone No.

P.O. BOX 37, LOCO HILLS, NEW MEXICO 88255 (505) 677-3223

## 4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1305' FSL, 1305' FWL, SEC 3, T17S, R31E

## 5. Lease Designation and Serial No.

LC 029426-B

## 6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation  
KEEL-WEST WATERFLOOD PROJECT

## 8. Well Name and No.

H.E. WEST "B" #49

## 9. API Well No.

30-015-26791

## 10. Field and Pool, or Exploratory Area

GRAYBURG JACKSON POOL

## 11. County or Parish, State

EDDY COUNTY, N.M.

## 12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

## TYPE OF SUBMISSION

- ☐
- Notice of Intent
- 
- ☒
- Subsequent Report
- 
- ☐
- Final Abandonment Notice

## TYPE OF ACTION


- ☐
- Abandonment
- 
- ☐
- Recompletion
- 
- ☐
- Plugging Back
- 
- ☐
- Casing Repair
- 
- ☐
- Altering Casing
- 
- ☒
- Other
- RUN SURFACE CASING AND CEMENT
- 
- ☐
- Change of Plans
- 
- ☐
- New Construction
- 
- ☐
- Non-Routine Fracturing
- 
- ☐
- Water Shut-Off
- 
- ☐
- Conversion to Injection
- 
- ☐
- Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

## 13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

SPOUDED WELL 04/05/93 @ 7:00 PM MSTSURFACE CSG.

Drlg 11" hole to 618'. Ran 15 jts (606.40') 8-5/8" 24# J-55 RNG & 3 ERW, 8 RND, ST&C csg. Set at 618'. Cemented w/250 gal Sodium Silicate. Followed w/300 sx Class "C" cmt containing 2% CaCl. Press mixing 90#, 1R mixing 5 BPM, press displacing 150#, 1R displacing 3 BPM. Circ 50 sx to pit. Job completed 8:30 am MST 04/06/93.

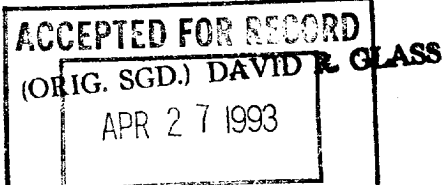

CARLSBAD, NEW MEXICO

## 14. I hereby certify that the foregoing is true and correct

Signed

Title PRODUCTION MANAGERDate APR 12, 1993

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any: