

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Cons. Division

811 S. 1st

Artesia, NM

FORM APPROVED
Budget Bureau No. 1004-0135
Expires March 31, 1993
5. Lease Designation and Serial No.

0-2834

LC-029342-C

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

WD McIntyre C #6

9. API Well No.

30-015-30292

10. Field and Pool, or Exploratory Area

Loco Hills Paddock

11. County or Parish, State

Eddy, NM

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Mack Energy Corporation

3. Address and Telephone No.

P.O. Box 960, Artesia, NM 88211-0960

(505)748-1288

4. Location of Well (Footage, Sec., T. R., M. or Survey Description)

Sec. 20-T17S-R30E 2310 FNL & 990 FEL

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION



☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Cement Long String

☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work)*

04/02/1999 TD 7 7/8" hole 8:30am @ 4865', Log Well, RIH w/ 119jts 5 1/2" 15.5# LT&C Landed at 4838', DV tool 3955', marker jt 4314', BJ Service cemented 1st stage w/ 170sx 50/50 Poz 2% gel, 5#salt, 5/10% FL25, circ 70sx. plug down 9:00am, Cemented 2nd stage w/500sx 35/65 6%gel, 3#salt 1/4#CF & 250sx 50/50 Poz 2% gel, 5/10%FL25 5#salt, circ 143sx. plug down 3:30pm

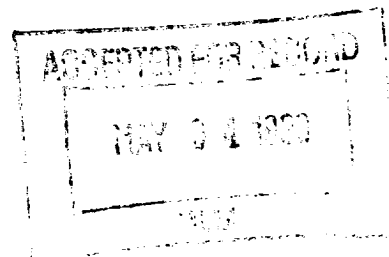

14. I hereby certify that the foregoing is true and correct

Signed

Gary Gourley

Title

Production Analyst

Date

4/29/99

(This space for Federal or State office use)

Approved

Conditions of approval, if any:

(ORIG. SGD.) GARY GOURLEY

Title

PETROLEUM ENGINEER

Date

[Signature]

