

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

N.M. Oil Co. Division
011 S. 1st Street
Artesia, NM 88210-2834

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

C/SF

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Mack Energy Corporation

3. Address and Telephone No.

P.O. Box 960, Artesia, NM 88211-0960 (505)748-1288

4. Location of Well (Footage, Sec., T. R., M. or Survey Description)

Sec-17,T17S-R30E 990 FSL & 990 FWL

5. Lease Designation and Serial No.

NM-86025

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

McIntyre DK Federal #13

9. API Well No.

30-015-30679

10. Field and Pool, or Exploratory Area

Loco Hills Paddock

11. County or Parish, State

Eddy, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION


- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other TD, Cement casing
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work)*

1/11/2000 TD 7 7/8" hole 4668' at 9:00AM.

1/12/2000 RIH with 5 1/2" csg 104 joints 17# LT&C J-55, Set @ 4663', Cemented 1st stage w/160sx 50/50 Poz, 2% gel, 5# salt, 5/10% HL25, Cemented 2nd stage w/450sx 35/65 Lite, 6% Gel, 6# salt, 1/4# CF, tail in w/250sx 50/50 Poz, 2% gel, 5# salt, 5/10% HL25, plug down 3:30 circ 85sx. release rig.

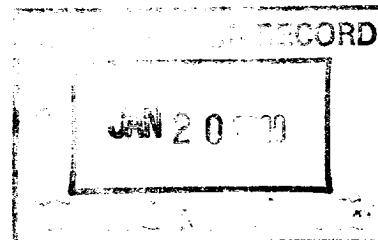

(ORIG SGD.) GARY GOURLEY

14. I hereby certify that the foregoing is true and correct

Signed

Cassidy Carter

Title

Production Analyst

Date

1/14/00

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title

PETROLEUM ENGINEER

Date

