


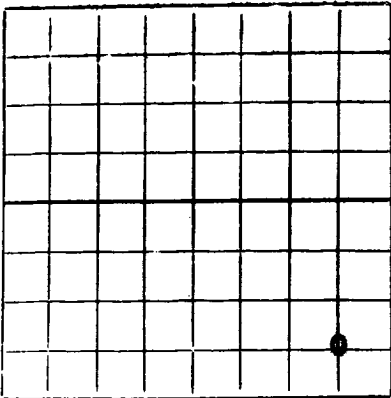

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

RECEIVED
NOV 10 1960

Mail to District Office, Oil Conservation Commission, to which Form C-108 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPLICATE. If State Land submit 6 Copies

The Ohio Oil Company
(Company or Operator)

Ethel V. Noel
(Lease)

Well No. 1, in SE 1/4 of SE 1/4, of Sec. 20, T. 18 S, R. 26 E, NMPM.

Atoka-Penn. Pool, Eddy County.

Well is 990 feet from South line and 990 feet from East line

of Section 20. If State Land the Oil and Gas Lease No. is

Drilling Commenced 8-3-60, 19. Drilling was Completed 9-23-60, 19.

Name of Drilling Contractor Great Western Drilling Company

Address Midland, Texas

Elevation above sea level at Top of casing 3439'. The information given is to be kept confidential until

19.

OIL SANDS OR ZONES

No. 1, from 9042 to 9077 No. 4, from to

No. 2, from to No. 5, from to

No. 3, from to No. 6, from to

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from to feet.

No. 2, from to feet.

No. 3, from to feet.

No. 4, from to feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
9 5/8	36 & 40	New	2007'	Guide			Surface
7	23 & 26	"	9208'	Differ.		8992-9001	
						9006-9020	Production
						9029-9042	

9090-9100

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
12 1/4	9 5/8	2010	1237	2-Stage with DV tool at 925'		
8 3/4	7	9155	275	2-Plug		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Result of Production Stimulation

Depth Cleaned Out

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto

TOOLS USED

Rotary tools were used from 0 feet to 9157 feet, and from feet to feet.
Cable tools were used from feet to feet, and from feet to feet.

PRODUCTION

Put to Producing 10-3-60, 19

OIL WELL: The production during the first 24 hours was barrels of liquid of which % was
was oil; % was emulsion; % water; and % was sediment. A.P.I.

Gravity absolute open flow w/GIR 86,969:1

GAS WELL: The production during the first 24 hours was 8400 M.C.F. plus barrels of
liquid Hydrocarbon. Shut in Pressure 2844 lbs.

Length of Time Shut in 18 hours

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

T. Anhy.
T. Salt.
B. Salt.
T. Yates.
T. 7 Rivers.
T. Queen.
T. Grayburg.
T. San Andres.
T. Glorieta.
T. Drinkard.
T. Tubbs.
T. Abo.
T. Penn.
T. Miss.

T. Devonian.
T. Silurian.
T. Montoya.
T. Simpson.
T. McKee.
T. Ellenburger.
T. Gr. Wash.
T. Granite.
T.
T.
T.
T.
T.

Northwestern New Mexico

T. Ojo Alamo.
T. Kirtland-Fruitland.
T. Farmington.
T. Pictured Cliffs.
T. Menefee.
T. Point Lookout.
T. Mancos.
T. Dakota.
T. Morrison.
T. Penn.
T.
T.
T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	482	482	Caliche, Red Beds				ELECTRIC LOG TOPS:
482	749	267	Sand, Shale				
749	810	61	Sand, Shale, Anhy.				
810	909	99	Lime				San Andres 887
909	944	35	Lime, Anhy.				Glorieta 2257
944	1183	239	Sandy, Lime				Abo 4433
1183	1360	177	Anhy., Lime				Wolfcamp 5830
1360	1837	477	Lime				Canyon 7745
1837	2169	332	Lime, Shale				Strawn 8180
2169	2918	749	Lime				Bend 8668
2918	3075	157	Lime, Sand				Bend Pay 9028
3075	3873	798	Lime				
3873	3925	52	Lime, Sand				
3925	4798	873	Lime				
4798	5392	594	Lime, Shale				
5392	5666	274	Lime, Shale, Sand				
5666	6781	1115	Lime, Shale				
6781	6855	74	Lime				
6855	7221	366	Lime, Shale				
7221	7359	138	Shale				
7359	7394	35	Lime				
7394	7841	447	Shale				
7841	7932	91	Shale, Lime				
7932	8238	306	Lime				
8238	8328	90	Lime, Shale				
8328	9011	686	Lime				
9011	9035	24	Shale, Lime, Sand				
9035	9058	23	Lime, Shale				
9058	9157	99	Lime, Shale, Sand				
9157	TOTAL	DEPTH					

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Company or Operator The Ohio Oil Company Address Hobbs, New Mexico 11-3-60
Name P. S. M. Position or Title Asst. Supt. (Date)