


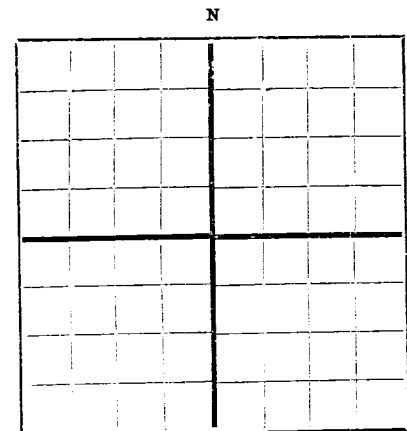

AREA 640 ACRES
LOCATE WELL CORRECTLY

NEW MEXICO OIL CONSERVATION COMMISSION
Santa Fe, New Mexico

WELL RECORD

Mail to Oil Conservation Commission, Santa Fe, New Mexico, or its proper agent not more than twenty days after completion of well. Follow instructions in the Rules and Regulations of the Commission. Indicate questionable data by following it with (?). SUBMIT IN TRIPLICATE. FORM C-110 WILL NOT BE APPROVED UNTIL FORM C-105 IS PROPERLY FILLED OUT.

Kersey & Co. Box 305, Artesia, N. Mex.
Company or Operator Address
M. R. Y. Well No. 3 in NW 1/4 SW 1/4 of Sec. 30, T. 18
Lease
R. 28, N. M. P. M., Artesia Field, Eddy County.
Well is 2970 feet south of the North line and 4950 feet west of the East line of Sec. 30-18-28
If State land the oil and gas lease is No. _____ Assignment No. _____
If patented land the owner is _____, Address _____
If Government land the permittee is _____, Address _____
The Lessee is as above, Address _____
Drilling commenced Jan. 22, 1950 19____. Drilling was completed Feb. 18, 1950 19____
Name of drilling contractor Kersey & Co., Address Artesia, N. Mex.
Elevation above sea level at top of casing _____ feet.
The information given is to be kept confidential until _____ 19____.

OIL SANDS OR ZONES

No. 1, from Gas 1831 to 1840 No. 4, from _____ to _____
No. 2, from Gas 1840 to 1850 No. 5, from _____ to _____
No. 3, from Oil 1886 to 1899 No. 6, from _____ to _____

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from _____ 330 to 340 feet.
No. 2, from _____ to _____ feet.
No. 3, from _____ to _____ feet.
No. 4, from _____ to _____ feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT & FILLED FROM	PERFORATED		PURPOSE
							FROM	TO	
<u>8 1/2</u>	<u>28 1/2</u>	<u>8V</u>	<u>used</u>	<u>485'</u>	<u>common</u>				

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED
<u>10"</u>	<u>8 1/2</u>	<u>485</u>	<u>60</u>	<u>Plug</u>		

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters — Material _____ Size _____

RECORD OF SHOOTING OR CHEMICAL TREATMENT

SIZE	SHELL USED	EXPLOSIVE OR CHEMICAL USED	QUANTITY	DATE	DEPTH SHOT OR TREATED	DEPTH CLEANED OUT
	<u>None</u>					

Results of shooting or chemical treatment _____

RECORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from 0 feet to 2179 feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing None, 19____.
The production of the first 24 hours was _____ barrels of fluid of which _____ % was oil; _____ % emulsion; _____ % water; and _____ % sediment. Gravity, Be. _____
If gas well, cu. ft. per 24 hours _____ Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYEES

A. M. Vandagriff, Driller E. R. Vandagriff, Driller
_____, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

Subscribed and sworn to before me this 4th
day of March, 1950.

Notary Public
My Commission expires June 14, 1951

Artesia, N. Mex. 3/4/50
Place Date
Name Harold Kersey
Position Partner
Representing Kersey & Co.
Company or Operator
Address Box 305, Artesia, N. Mex.

FORMATION RECORD

FROM	TO	THICKNESS IN FEET	FORMATION
0	35	35	Caliche
35	100	65	Red Beds & Gyp
100	300	200	Red Beds & Anhy
300	1120	820	Anhy
1120	1160	40	Anhy & Lime Shells
1160	1185	25	Red Sand
1185	1215	30	Anhy & Shale
1215	1403	188	Anhy
1403	1425	22	Red Sand
1425	1755	330	Anhy & Lime Shells
1755	1836	131	Gray Lime - show of gas 1831-1840 increase of gas 1840 - 1850
1836	1899	13	Brown Lime - show of oil
1899	2007	106	Gray Lime - increase of gas 1989-2000
2007	2015	8	Pink Lime
2015	2023	8	Sandy Lime
2023	2125	102	Gray Lime
2125	2179	54	White Lime - San Andres

Total Depth 2179'