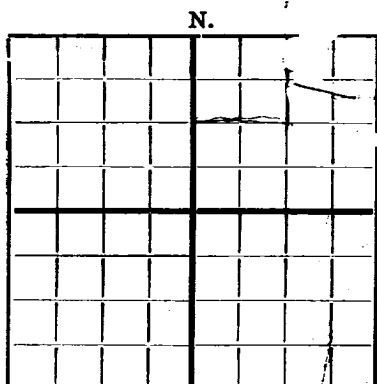


AREA 640 ACRES
LOCATE WELL CORRECTLY

DEPARTMENT OF THE STATE GEOLOGIST

NEW MEXICO SCHOOL OF MINES
Socorro, New Mexico

WELL RECORD

Mail to State Geologist, Socorro, New Mexico, not more than ten days
after completion of well. Indicate questionable data by fol-
lowing it with (?). Submit in duplicate.

Company Operators Oil Co Address 214 Daniel Bldg. Tulsa, Okla.
Send correspondence to Do Address Do
Well No. 17 in NE of SE of Sec. 4, T. 18
R. 28, N. M. P. M., Oil Field Eddy County.
If State land the oil and gas lease is No. _____ Assignment No. _____
If patented land the owner is _____, Address _____
The lessee is Mrs Ellen Aaron, Address _____
If not state or patented land, give status _____
Drilling commenced July 9th 19 27 Drilling was completed Sept 1st 19 27
Name of drilling contractor Fred M. Boso, Address 214 Daniel Bldg. Tulsa, Ok.
Elevation above sea level at top of casing _____ feet.
The information given is to be kept confidential until _____ 19 _____

OIL SANDS OR ZONES

No. 1, from 2104 to 2108 No. 4, from _____ to _____
No. 2, from 2130 to 2140 No. 5, from _____ to _____
No. 3, from 2285 to 2300 No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from 360 to 380 Hole Full No. 3, from _____ to _____
No. 2, from 1115 to 1120 1 Bailer in 24 hrs. to _____

CASING RECORD

SIZE	WEIGHT PER FOOT	THREADS PER INCH	MAKE	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATED		PURPOSE
							FROM	TO	
<u>10"</u>	<u>32#</u>	<u>8</u>	<u>Etna</u>	<u>285'</u>	<u>Will be pulled.</u>				
<u>8"</u>	<u>24#</u>	<u>8</u>	<u>"</u>	<u>795'</u>	<u>Texas</u>				

MUDDING AND CEMENTING RECORD

SIZE	WHERE SET	No. SACKS OF CEMENT	METHODS USED	MUD GRAVITY	AMOUNT OF MUD USED

PLUGS AND ADAPTERS

Heaving plug—Material _____ Length _____ Depth Set _____
Adapters—Material _____ Size _____

SHOOTING RECORD

SIZE	SHELL USED	EXPLOSIVE USED	QUANTITY	DATE	DEPTH SHOT	DEPTH CLEANED OUT
<u>6</u>	<u>Tin</u>	<u>Nitro</u>	<u>20 Qts</u>		<u>2104-8</u>	<u>2409</u>
<u>5</u>	<u>"</u>	<u>"</u>	<u>40 "</u>		<u>2130-40</u>	
<u>5</u>	<u>"</u>	<u>"</u>	<u>80 "</u>		<u>2285-2300</u>	

TOOLS USED

Rotary tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet
Cable tools were used from 0 feet to 2411 feet, and from _____ feet to _____ feet

PRODUCTION

Put to producing Sept 15th, 19 27
The production for the first 24 hours was 69 barrels of fluid of which 100 % was oil; _____ %
emulsion; _____ % water; and _____ % sediment. Gravity, Be. _____
If gas well, cu. ft. per 24 hours 12000 Gallons gasoline per 1,000 cu. ft. of gas _____
Rock pressure, lbs. per sq. in. _____

EMPLOYES

CC Delong, Driller M. E. Turner, Driller
L. C. Lombke, Driller _____, Driller

FORMATION RECORD ON OTHER SIDE

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all
work done on it so far as can be determined from available records.

Subscribed and sworn to before me this _____

day of February, 19 28Monas Scott
Notary PublicName J. O. MeddowPosition AgentRepresenting Operators Oil Co

My commission expires _____ Company or Operator

My commission expires Sept. 28, 19 31

FORMATION RECORD

From	to	Thickness in Feet	Formation
0	25	25	Lime
25	215	190	Red Rock
215	360	45	Gyp & Red Rock
360	380	20	Sand, Hole full of water
380	415	35	Red Rock & Gyp
415	450	35	Lime
450	455	5	Red Rock
455	500	45	Lime & Gyp
500	505	5	Red Rock
505	510	5	Gyp
510	550	40	Red Rock
550	560	10	Red Sand
560	590	30	Red Rock
590	595	5	Gyp
595	685	90	Red Rock
685	720	35	Lime & Gyp
720	735	15	Red Rock
735	793	58	Red Rock & Gyp
793	980	182	Lime, A little Oil at 840
980	975	5	Red Rock
975	1115	135	Lime White
1115	1120	5	Lime White
1120	1140	20	Pink Lime, 1 Barrel Salt Water
1140	1145	5	Lime White
1145	1155	10	Red Sand
1155	1190	45	Lime
1190	1210	20	Red Rock & Gyp
1210	1290	80	Lime, White
1290	1330	40	Pink Lime
1330	1365	35	Lime, White
1365	1385	20	Lime, White
1385	1430	45	Red Sand
1430	1465	15	Lime, White
1465	1515	70	Pink Lime
1515	1525	10	Gyp
1525	1590	65	Lime, White
1590	1610	20	Red Rock & Gyp
1610	1615	5	Lime, White
1615	1690	75	Sand Lime
1690	1705	15	Lime, White
1705	1760	55	Sandy Lime
1760	1790	30	Pink Lime
1790	1800	10	Lime, Pink
1800	1950	150	Brown Lime
1950	2104	154	Gray Lime
2104	2108	4	Sand, OIL
2108	2130	22	Lime
2130	2140	10	Sand, OIL
2140	2158	18	Broken Shale
2158	2280	12	Lime
2280	2300	20	Sand
2300	2411	111	Lime