

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
NM 88210

SUBMIT IN TRIPLICATE
(Other instruction
verse side)

Form approved.
Budget Bureau No. 1004-0135
Expires August 31, 1985

45F

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

1. OIL WELL <input type="checkbox"/> GAS WELL <input type="checkbox"/> OTHER <input checked="" type="checkbox"/> P&A	5. LEASE DESIGNATION AND SERIAL NO. LC 051102-B
2. NAME OF OPERATOR Yates Petroleum Corporation	6. IF INDIAN, ALLOTTEE OR TRIBE NAME
3. ADDRESS OF OPERATOR 105 South 4th St., Artesia, NM 88210	7. UNIT AGREEMENT NAME
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface 990' FNL & 1650' FEL, Sec. 1-T18S-R29E	8. FARM OR LEASE NAME Ballard B
14. PERMIT NO.	9. WELL NO. 4
15. ELEVATIONS (Show whether F, RT, GR, etc.) 3348' KB	10. FIELD AND POOL, OR WILDCAT Loco Hills-O-G-SA
ARTESIA, OFFICE	11. SEC., T., S., R., OR BLK. AND SURVEY OR AREA Unit B, Sec. 1-18S-29E
	12. COUNTY OR PARISH Eddy
	13. STATE NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

PULL OR ALTER CASING

FRACTURE TREAT

MULTIPLE COMPLETION

SHOOT OR ACIDIZE

ABANDON*

REPAIR WELL

CHANGE PLANS

(Other)

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*


(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Plugged well as follows:

Spotted 125 sx Class "C" w/4% CaCl₂ at 2790'. Tagged w/wireline at 2130'.
Perforated 2 squeeze holes at 1215'. Could not pump into at 750 psi.
Spotted 35 sx Class "C" from 1275-1075'.
Perforated 2 squeeze holes at 398'.
Spotted 120 sx Class "C" cement from 465' to surface.
Welded plate over 7". Pressured 7" to 150 psi at surface.
Installed regulation abandonment marker.

Plugging witnessed 9-26-86 and 9-27-86 by BLM representative, Mr. Hare.
Plugging witnessed 9-29-86 by NMOC representative, Mr. Mike Williams

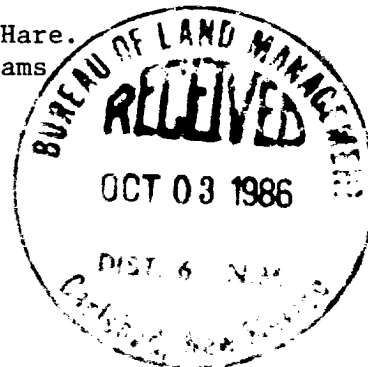

18. I hereby certify that the foregoing is true and correct

SIGNED James A. Doolittle

TITLE Production Supervisor

DATE 10-1-86

(This space for signature of State or BLM representative)

APPROVED BY Acting Area Manager

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

5-27-87

Post ID-2
10-17-86
PYA

*See Instructions on Reverse Side