

RECEIVED BY Place Artesia, New Mexico
Date April 12, 1943

JUN 10 1986

O. C. D.
Glenn Staley
Proration Office
Hobbs, New Mexico.
Designate UNIT well is located in
A

D	C	B	X
E	F	G	H
I	K	J	I
M	N	O	P

NOTICE OF COMPLETION OF: (Lease) Puckett Well No. 6-B
660 feet from North line: 660 feet from South line; S.T. & R
25-17S-31E

DATE STARTED February 9, 1943
DATE COMPLETED April 8, 1943
ELEVATION _____
TOTAL DEPTH S.L.L. 3945
CABLE TOOLS 3945 ROTARY TOOLS _____

GRAYBURG-JACKSON

CASING RECORD

SIZE 8 1/2" DEPTH 630 S&W CEMENT 50
SIZE 7" OD DEPTH 3325 S&W CEMENT 100
SIZE _____ DEPTH _____ S&W CEMENT _____

TUBING RECORD

SIZE 2" DEPTH 3900

ACID RECORD

NO. GALS _____ NO. ITS. _____
NO. GALS _____ NO. ITS. _____
NO. GALS _____ NO. ITS. _____

FORMATION TOPS

Anhydrite 618
Top Salt 920
Base Salt 1785
Red Sand 145
Brown Lime _____
White Lime 2680 3300
Oil or Gas Pay 3888 3900
Water 5288 575

Connected
4/19/43
575
780
1790
2940
3300
3880
3940 3945
none

Initial Production Test 72 bbls Pumping _____ Flowing yes
Test After Acid or Shot _____

Initial GAS VOLUME _____

SCHEDULE NO. _____ DATE _____


PIPE LINE TAKING OIL Texas-New Mexico Pipe Line Company

REMARKS _____ COMPANY Emperor Oil Company

% Brewer Drilling Company

SIGNED BY: FRB

Partner

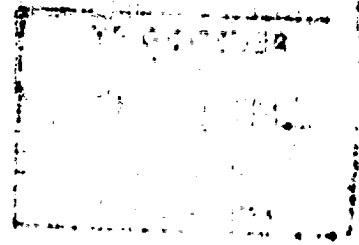

RECEIVED BY

JUN 10 1936

(SUBMIT IN TRIPLICATE)

U. S. Land Office **Las Cruces**
029415-B
Lease or permit No.

O. C. D.
ARTESIA OFFICE

UNITED STATES

Allottee

DEPARTMENT OF THE INTERIOR

Lease No.

GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	☒
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	☐
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	☐
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF REDRILLING OR REPAIR	☐
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	☐
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	☐
NOTICE OF INTENTION TO ABANDON WELL		☐

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

August 9, 1943

Well No. B-8 is located 650 ft. from N line and 660 ft. from E line of sec. 26

NE/4 of NE/4 175 31E N.M.P.M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Jackson-Grayburg 2367 New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Shot line pay zone from 3970 to 3940 with 210 quarts of nitro glycerin. Cleaned itself in four hours after shot. First test flowed 132 through 2" tubing in 12 hours. Second test flowed 100 barrels in 5-1/2 hours now through tubing.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.


Company Emperor Oil Company

Address 1810 Electric Building

Fort Worth, Texas

By

Title President

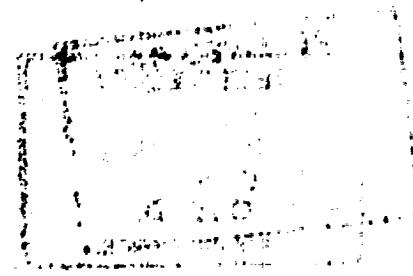

(SUBMIT IN TRIPLICATE)

J. S. Land Office Las Cruces

Lease or permit No. 029-415-B

Allottee

Lease No.

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

RECEIVED BY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	X
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Artesia, New Mexico March 18, 1943

Well No. 6-B is located 660 ft. from N line and 660 ft. from E line of sec. 25

NE¹ of NE¹ 25
($\frac{1}{4}$ Sec. and Sec. No.)

17
(Twp)

31
(Range)

N.M.P.M.
(Meridian)

Skelly
(Field)

Eddy
(County or Subdivision)

New Mexico
(State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK


(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

7" casing was mudded and cemented with 100 sacks by International Cementers at 3325 feet on March 14 at 4:00 P. M. After allowing cement to set 72 hours, hole was tested on March 17, 1943 and was dry. Everything is all right.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Emperor Oil Company,
Address % Brewer Drilling Company
Box 566,
Artesia, New Mexico.

By [Signature]
Title Agent

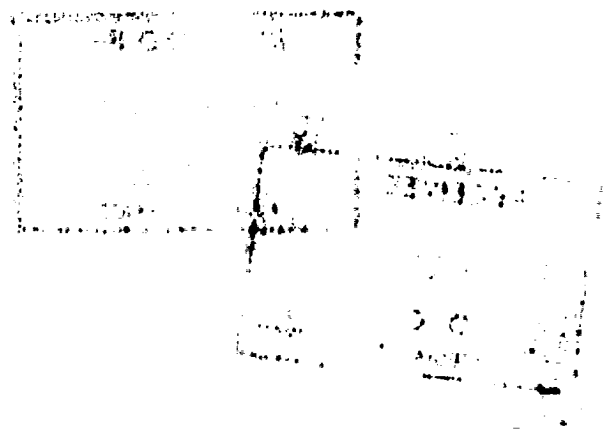

RECEIVED

JUN 10 1943

(SUBMIT IN TRIPLICATE)

U. S. Land Office Las Cruces

Lease or permit No 029415-B

Allottee

Lease No

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL		SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	X	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Artesia, New Mexico March 14, 1943

Well No. 6-B is located 660 ft. from N line and 660 ft. from E line of sec. 25

NE¹ of NE¹ 17 31 N.M.P.M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Skelly Eddy New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Ran 7" casing at 3325. Mudded and cemented with 100 sacks by
International Cementers March 14 at 4:00 P. M. Will let cement
set 72 hours and then plan to test water shut-off.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Emperor Oil Company

Address % Brewer Drilling Company


Artesia, New Mexico

BREWER DRILLING COMPANY

By

Title

Agent

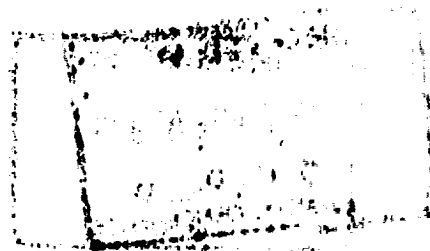

(SUBMIT IN TRIPLICATE)

U. S. Land Office. Las Cruces

Lease or permit No. 029415-B

Allottee

Lease No.

UNITED STATES

DEPARTMENT OF THE INTERIOR

GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....	SUBSEQUENT REPORT OF WATER SHUT-OFF.....	☒
NOTICE OF INTENTION TO CHANGE PLANS.....	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....	SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....	SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....	SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

February 25, 1943, 19

Well No. 6B is located 660 ft. from N line and 660 ft. from E line of sec. 25


NE 1/4 of NE 1/4 17 31 N.M.P.M.
(1/4 Sec. and Sec. No.) (Twp.) (Range) (Meridian)
Skelly Eddy New Mexico
(Field) (County or Subdivision) (State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

8 1/4" 28-lb. casing was set at 630 feet with 50 sacks cement by International Cementers. After allowing cement to set 72 hours, hole was tested on February 15, 1943. Tested dry and was in good shape.

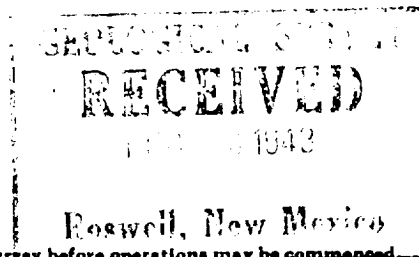

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Emperor Oil Company

Address % Brewer Drilling Company


Artesia, New Mexico

By

Title

BREWER DRILLING COMPANY

Agent

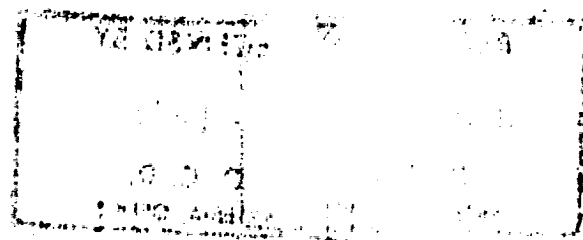

(Nov. 1936)

Indian Agency

(SUBMIT IN TRIPLICATE)

U. S. Land Office LAS CRUCES

Lease or permit No. 029415-B

Allottee

Lease No.

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL.....		SUBSEQUENT REPORT OF WATER SHUT-OFF.....	
NOTICE OF INTENTION TO CHANGE PLANS.....		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING.....	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF.....	X	SUBSEQUENT REPORT OF ALTERING CASING.....	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL.....		SUBSEQUENT REPORT OF REDRILLING OR REPAIR.....	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE.....		SUBSEQUENT REPORT OF ABANDONMENT.....	
NOTICE OF INTENTION TO PULL OR ALTER CASING.....		SUPPLEMENTARY WELL HISTORY.....	
NOTICE OF INTENTION TO ABANDON WELL.....			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

Puckett

February 16, 1943, 19

Well No. 6-B is located 660 ft. from $\begin{matrix} N \\ E \end{matrix}$ line and 660 ft. from $\begin{matrix} E \\ W \end{matrix}$ line of sec. 25NE $\frac{1}{4}$ of NE $\frac{1}{4}$
($\frac{1}{4}$ Sec. and Sec. No.)17S
(Twp.)31E
(Range)N.M.P.M.
(Meridian)Skelly
(Field)Eddy
(County or Subdivision)New Mexico
(State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Set 8 $\frac{1}{4}$ " casing at 630 feet. Cemented with 50 sacks. Allowed cement to set 72 hours and tested dry. We encountered no water in this well and the casing was cemented in a dry hole and the cement job is in good order. This casing was run on February 12, 1943 and cemented by the International Cementers.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.


Company Emperor Oil CompanyAddress % Brewer Drilling Company

BREWER DRILLING COMPANY

Artesia, New Mexico

By

Title Agent

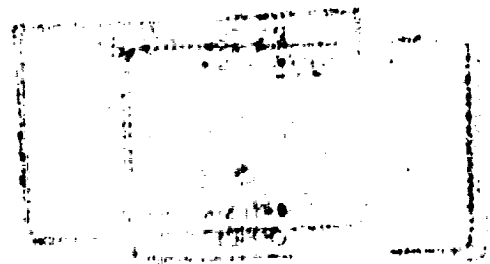

Indian Agency

(SUBMIT IN TRIPLICATE)

U. S. Land Office Las Cruces

Lease or permit No. 029415-B

Allottee

Lease No.

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	☒	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS		SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF		SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL		SUBSEQUENT REPORT OF REDRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE		SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING		SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL			

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

January 22, 1943

Well No. 6-B is located 660 ft. from $\begin{matrix} N \\ S \end{matrix}$ line and 660 ft. from $\begin{matrix} E \\ W \end{matrix}$ line of sec. 25

NE $\frac{1}{4}$ of NE $\frac{1}{4}$ 17S 31E N.M.P.M.
($\frac{1}{4}$ Sec. and Sec. No.) (Twp.) (Range) (Meridian)

Skelly
(Field)

Eddy
(County or Subdivision)

New Mexico
(State or Territory)

The elevation of the derrick floor above sea level is _____ ft.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

Plan to set approximately 600 feet of 8 $\frac{1}{2}$ " 28# casing to the top of the salt and cement with 50 sacks of cement and 50 sacks of mud.

Plan to set approximately 3,350 feet of 7" OD 20# casing and cement with 150 sacks of cement.

Plan to drill with cable tools.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Emperor Oil Company


Address % Brewer Drilling Company

Artesia, New Mexico

BREWER DRILLING COMPANY

By

Title Agent



FOI ACTION RECORD-Continued

FROM	TO	TOTAL FEET	FORMATION	REMARKS
795	845	50	Anhydrite and broken salt	
845	880	35	Salt & red rock, broken	
880	900	20	Anhydrite	
900	920	20	Anhydrite and red rock	
920	975	55	Salt & anhydrite breaks	
975	1040	65	Salt	
1040	1105	65	Salt & anhydrite, broken	
1105	1135	30	Salt & anhydrite, broken	
1135	1195	60	Salt	
1195	1225	30	Salt & red rock	
1225	1260	35	Salt & potash	
1260	1295	35	Salt & Broken potash	
1295	1350	55	Salt and potash	
1350	1415	65	Salt & potash	
1415	1490	75	Salt & potash	
1490	1550	60	Salt and potash	
1550	1595	45	Salt	
1595	1605	10	Anhydrite & potash	
1605	1670	65	Salt & potash	
1670	1730	60	Salt & potash	
1730	1785	55	Salt & potash	
1785	1790	5	Anhydrite	
1790	1835	45	Anhydrite	
1835	1875	40	Anhydrite	
1875	1920	45	Anhydrite	
1920	1985	65	Anhydrite	
1985	1990	5	Anhydrite	
1990	2000	10	Broken anhydrite	
2000	2010	10	Anhydrite	
2010	2040	30	Anhydrite	
2040	2080	40	Anhydrite	
2080	2120	40	Anhydrite & lime	
2120	2145	25	Anhydrite	
2145	2160	15	Anhydrite	
2160	2170	10	Sand	
2170	2175	5	Anhydrite	
2175	2190	15	Sand	
2190	2200	10	Yates sand & shale	
2200	2210	10	Anhydrite	
2210	2220	10	White lime	
2220	2237	17	Lime	
2237	2270	33	Lime	
2270	2300	30	Anhydrite	
2300	2325	25	Anhydrite	
2325	2350	25	Anhydrite	
2350	2355	5	Brown lime	
2355	2370	15	Anhydrite	
2370	2385	15	Brown lime	
2385	2400	15	Brown lime	
2400	2410	10	Brown lime	
2410	2440	30	Anhydrite	
2440	2455	15	Brown lime	
2455	2475	20	Anhydrite and lime	
2475	2490	15	Lime and anhydrite	
2490	2510	20	Lime and anhydrite	
2510	2540	30	Lime and anhydrite	
2540	2570	30	Anhydrite and lime	
2570	2580	10	Anhydrite	

2590	2620	20	20
2600	2600	20	20
2630	2655	25	Lime and anhydrite
2655	2680	25	Anhydrite
2680	2705	25	Lime and anhydrite
2705	2735	30	Anhydrite
2735	2800	65	Anhydrite
2800	2825	25	Brown and anhydrite
2825	2840	15	Anhydrite
2840	2862	22	Anhydrite
2862	2900	38	Lime and Anhydrite
2900	2950	50	Anhydrite
2950	2960	10	Red sand
2960	2965	5	Sand, red - Show of oil
2965	2980	15	Brown sand
2980	3135	155	Anhydrite and lime
3135	3140	5	Red sand
3140	3200	60	Anhydrite and lime
3200	3230	30	Red sand and anhydrite
3230	3240	10	Hard lime
3240	3255	45	Lime and anhydrite
3255	3300	15	Brown lime and hard
3285	3315	15	White lime
3300	3400	85	Lime
3315	3405	5	Gray lime
3400	3410	5	Brown lime - Light show of oil
3405	3475	65	Lime
3410	3500	25	Lime
3475	3525	25	Lime, gray
3500	3530	5	Blue lime
3525	3560	30	Lime, gray
3530	3595	35	Lime, hard
3560	3610	15	White lime
3595	3640	30	Gray lime
3610	3650	10	White hard lime
3640	3710	60	White lime
3650	3725	15	Brown lime
3710	3740	15	White lime
3725	3750	10	Gray lime
3740	3755	5	Gray lime
3750	3760	5	White lime
3755	3765	5	Blue lime, hard
3760	3795	30	Gray lime
3765	3805	10	White lime
3795	3815	10	Gray and red lime
3805	3825	10	Brown lime - Small show oil
3815	3845	20	Gray lime
3825	3855	10	Blue lime
3845	3858	2	Blue hard lime
3855	3864	6	Soft lime - Small show oil 3858-3864
3858	3872	8	Blue and gray lime
3864	3880	8	Gray lime - Sulphur gas & increase in oil
3872	3894	14	White lime - 800 ft oil in hole
3880	3900	6	White oil - Increase in oil
3894	3910	10	Blue lime
3900	3920	10	Blue soft lime - Flowed
3910	3945	25	Gray lime
3920			