

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Oil Cons. Division

ckf

FORM APPROVED

Budget Bureau No. 1004-0135
Expires March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☐ Gas Well ☒ Other WIW

2. Name of Operator

DEVON ENERGY CORPORATION (NEVADA)

3. Address and Telephone No.

20 NORTH BROADWAY, SUITE 1500, OKLAHOMA CITY, OKLAHOMA 73102 (405)552-4527

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FSL & 660' FEL, Sec. 30-17S-31E

5. Lease Designation and Serial No.

LC-029395-B

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Turner "B" #53

9. API Well No.

30-015-05472

10. Field and Pool, or Exploratory Area

Grayburg Jackson

11. County or Parish, State

Eddy County, NM

CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ Other -----

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☒ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

The following work was done to convert to water injection well:


1/23/97 - Ran bit & csg scraper to 3350'. Tested csg.

1/24/96 - Perf'd Metex - Vacuum 3288'-3480' w/15 - .49" holes. Acidized perfs 3288'-3494' w/3000 gals 15% HCl acid & 3500# rock salt.

1/25/97 - Perf'd Grayburg - Metex 3022'-3251' w/13 - .49" holes. Acidized perfs 3022'-3251' w/1300 gals 15% HCl acid.

1/27/96 - RIH w/5 1/2" Baker J-loc pkr, seating nipple & 84 jts of 2 3/8" IPC tbg. Set pkr @ 2946'. Tested to 300 psi for 15 min.

4/13/97 - Began injecting.

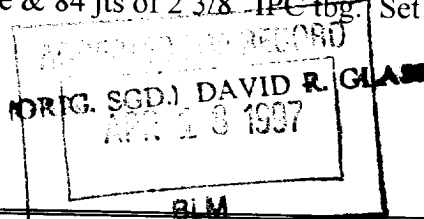

14. I hereby certify that the foregoing is true and correct

Signed Karen Byers
(This space for Federal or State office use)

KAREN BYERS
Title ENGINEERING TECHNICIAN

Date 04/14/97

Approved by _____
Conditions of approval, if any: _____

Title _____

Date _____