

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

RECEIVED

SUNDY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

643  
AREA

SUBMIT IN TRIPLICATE

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

5. Lease Designation and Serial No.

NM-02056

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

North Turkey Track MU Fed.

9. API Well No. Com #1

30-015-23136

10. Field and Pool, or Exploratory Area

No. Turkey Track Morrow

11. County or Parish, State

Eddy Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent  
☒ Subsequent Report  
☐ Final Abandonment Notice


TYPE OF ACTION

- ☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☒ Other Acidize perfs.  
☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Moved in and rigged up pulling unit. Loaded tubing and annulus with 2% KCL water. Nippled down wellhead and installed BOP. TIH w/RBP, packer and tbg. Set RBP at 11045' and tested to 1500#. Spotted 1 barrel 7-1/2% NEFE acid across perforations 11021-11028'. Set packer at 10947'. Removed BOP and nipped up wellhead. Loaded annulus with 2% KCL water. Pulled up with packer to 10859'. Perfs would not take any fluid. Dropped down with packer to 11045' and reversed hole clean with 2% KCL water. Set packer at 10859'. TIH w/1-11/16" gamma ray. Top of RBP at 11017'. TOOH. Unset packer and RBP. TOOH w/tubing, packer and RBP. TIH w/lokset RBP, packer and tubing. Set RBP at 11030' and packer at 10947'. Acidized perforations 11021-11028' (Morrow) with 1000 gallons 7-1/2% Morrow acid. Swabbed. Released to production.

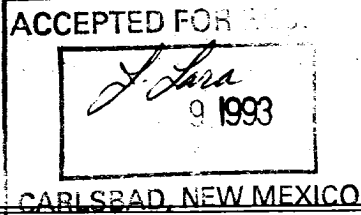

14. I hereby certify that the foregoing is true and correct

Signed Rusty Allen Title Production Clerk Date 10-31-93

(This space for Federal or State office use)

Approved by \_\_\_\_\_ Title \_\_\_\_\_ Date \_\_\_\_\_  
Conditions of approval, if any: