

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

MAR - 5 1992

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well
☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator


Premier Production Company

3. Address and Telephone No.

P.O. Box 1246, Artesia, NM 88210 (505) 748-2099

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Section 23: SE/4 SW/4
T-18S R-29E

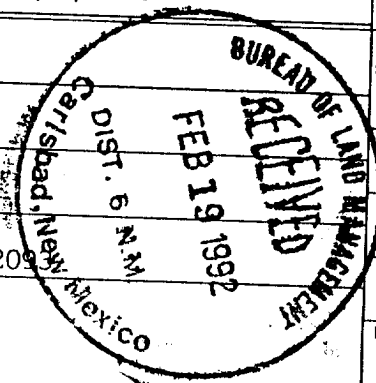

5. Lease Designation and Serial No.

NNNM17223

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Alice Federal #2

API Well No.

300152497000S1

10. Field and Pool, or Exploratory Area

Turkey Track, SR,Q,GB,SA

11. County or Parish, State

Eddy, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other plug
☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

We propose to plug this well in the following manner: (The 5 1/2" casing is circulated and will be left in tact.) Rig up pulling unit to pull rods & pump; pull tubing & remove seating nipple. Go back in hole w/tubing open-ended; tag bottom. Pump 500' (50sax) Class C cement; plug from 2700' to 2450'. Pump 500' (50sax) cement plug 2400' 59 1900'. Tag plug & pump 500' (50sax) cement plug 1900' to 1500'; tag plug. Pump 400' 10# mud 1500' to 1100'. Pump 300' plug 1100' to 800' to isolate bottom of salt. Pump 10# mud 800' to 400'. Pump 150' plug 400' to 250' to isolate top of salt. Pump 50' surface plug & install 4'x4" dry-hole marker. Back fill pits & cleanup location.

14. I hereby certify that the foregoing is true and correct

Signed Larry Jones Title owner/operator

Date 2-10-92

(This space for Federal or State office use)

Approved by David H. Glass
Conditions of approval, if any:

Title REGIONAL ENGINEER

Date 3/5/92

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side