


DEVON ENERGY CORPORATION - WELLBORE SCHEMATIC

ATTACHMENT III

| | | | | | | |
|---|----------|---------------------------|--------------------|---------------------|---------------|-----------|
| WELL NAME: West Red Lake Unit #33 | | | FIELD: Red Lake | | | |
| LOCATION: 660' FNL & 860' FEL, Sec. 8-18S-27E | | | COUNTY: Eddy | | | STATE: NM |
| ELEVATION: 3448' GL | | | SPUD DATE: 10/2/84 | COMP DATE: 10/30/84 | | |
| API#: 30-015- 24987 | | PREPARED BY: T. Rutelonis | | | DATE: 5/18/99 | |
| | DEPTH | SIZE | WEIGHT | GRADE | THREAD | HOLE SIZE |
| CASING: | 0'-1045' | 8-5/8" | 24# | | | 11" |
| CASING: | 0'-2150' | 5-1/2" | 14# | | | 7-7/8" |
| CASING: | | | | | | |
| TUBING: | 0-1898' | 2-3/8" | | | | |
| TUBING: | | | | | | |

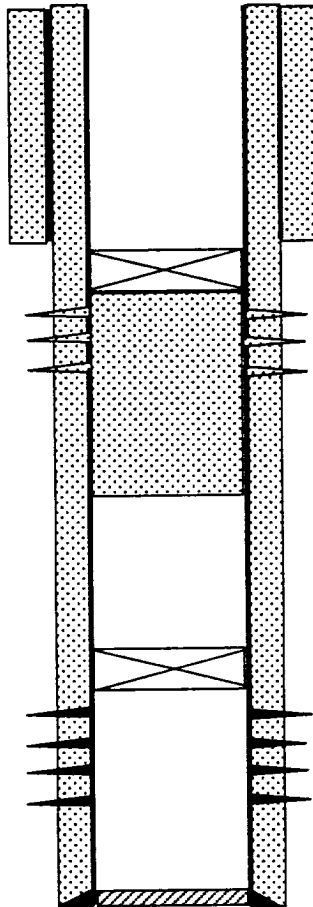

CURRENT



PROPOSED

OPERATOR: DEVON ENERGY CORPORATION

8-5/8" 24# @ 1045' w/500 sxs cmt, TOC surf.

Cement retainer set @ 1113'

Premier perforations: 1232'-41' (Squeezed)

Holes in 5-1/2" casing @ 1348'-58' (Squeezed w/ 150 sx)

Cement retainer set @ 1852'

San Andres perforations: 1886'-2028'

5-1/2" 14# @ 2150' w/350 sxs cmt, TOC surf.

PBTD 1980'

TD 2150'

