

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OIL CONSERVATION DIV
811 S. 1st ST.
ARTESIA, NM 88210-2834

FORM APPROVED
Budget Bureau No. 1004-0135
Expires March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.

SUBMIT IN TRIPLICATE

1 Type of Well:
☐ Oil Well ☒ Gas Well ☐ Other

2 Name of Operator

MEWBORNE OIL COMPANY

3 Address and Telephone No.

P.O. BOX 5270, Hobbs, NM (505)-393-5905

4 Location of Well (Footage Section, T., R., M., or Survey Description)

SURFACE: 1650' FSL & 1650' FEL

TD: 1356' FSL & 2012' FWL SEC. 32 - T18S - R27E

5 Lease Designation and Serial No

NM - 86107

6 If Indian, Allottee or Tribe Name

7 If Unit or CA, Agreement Designation

8 Well Name and No

Kaiser Lake Fed. #1

9 API Well No

30 - 015 - 26779

10 Field and Pool, or Exploratory Area

East Lake Morrow

11 County or Parish, State

Eddy Co. NM

12 CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☒ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☐ Other

☐ Change of Plans

☐ New Construction

☐ Non-Routine Fracturing

☐ Water Shut-Off

☐ Conversion to Injection

☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13 Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

9/13/95 Released Packer & TOOH.

9/14/95 SET CIBP @ 9690' on Wireline.

9/18/95 Tagged CIBP @ 9690' w/TBG. Circulated hole w/plugging mud. Spotted 25 sk cement plug on CIBP. Set cement plugs @ 9410' - 9310', 8280' - 8180', 7285' - 7185'.


9/19/95 Pulled stretch on 5 1/2" casing. Casing parted @ 200'.

9/20/95 Set cement plugs @ 4400' - 4300' & 2880' - 2780'. Tagged plug @ 2780' w/TBG.

Set cement plugs @ 450' - 350' & Surface.

9/22/95 Cut off wellhead & installed P & A Marker.

Post ID-2
9-6-96
PJA

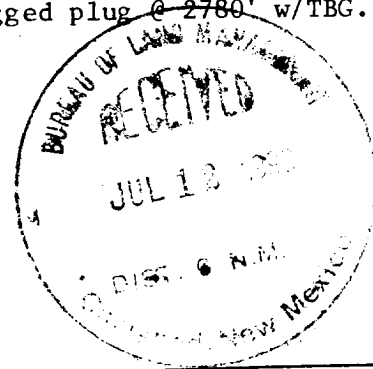

14 I hereby certify that the foregoing is true and correct

Signed

Title Dist. Mgr.

Date 7/10/96

(This space for Federal or State official use)

Approved by

Title

Petroleum Engineer

Date 8/1/96

Conditions of approval, if any

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction

*See instruction on Reverse Side