

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

NM OIL CONS COMMISSION
Drawer DD FORM APPROVED
Artesia, NM 88210 1004-0135
Expires: March 31, 1993

CL51

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

JAN 19 '95

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Mewbourne Oil Company

3. Address and Telephone No.

P.O. Box 5270 Hobbs, New Mexico 88241 (505) 393-5905

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FNL & 510' FWL
Sec. 29-T18S-R30E

Unit "E"

5. Lease Designation and Serial No.

NM-27279

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Santo Nino "29" Fed. #1

9. API Well No.

10. Field and Pool, or Exploratory Area

Santo Nino Bone Spring

11. County or Parish, State

Eddy County, N.M.

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Run & Cement 5-1/2"
Production Casing
- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)


13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

12-06-94 Drilled 7-7/8" hole to 8,406' K.B. Ran electric logs and evaluated same. Ran 5-1/2" casing string as follows top to bottom; 24 jts. of 17#, L-80, used 8rd, LT&C (909') + 155 jts. of 17#, K-55, used 8rd, LT&C (6,435') + 31 jts. of 17#, L-80, used 8rd, LT&C (1,076'). Received verbal permission from Adam Salameh of Carlsbad BLM office @ 3:30 p.m. 12-02-94 to run this casing design. Halliburton cemented w/800 sacks of Class "H" Lite containing 8#/sk. salt + 114#/sk. flocele (12.4#/gal., 2.15 cu. ft.) followed by 350 sks. Class "H" neet containing .3% Halad 322 + .3% Halad 344 + 5#/sk. salt (16.0#/gal., 1.18 cu.ft.) Plug down @ 4:30 a.m. Rig released at 10:30 a.m. 12-06-94.

ACCEPTED FOR RECORD

JAN 18 1995

CARLSBAD, NEW MEXICO

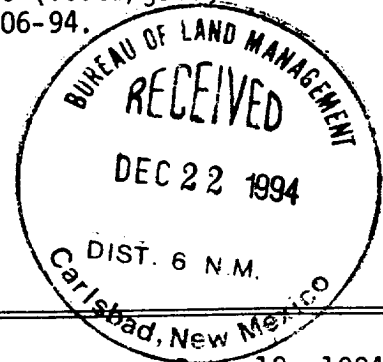

14. I hereby certify that the foregoing is true and correct

Signed

Bill Pierce

Title Drilling Superintendent

Date Dec. 12, 1994

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any: