

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT TO OIL CON. DIV. FORM APPROVED

811 S. 1st ST.
ARTESIA, NM 88210-2834
(See other in reverse side)

CLSF

WELL COMPLETION OR RECOMPLETION REPORT AND LOG*

1a TYPE OF WELL: OIL WELL ☒ GAS WELL ☐ DRY ☐ Other ☐
b TYPE OF COMPLETION: NEW WELL ☒ WORK OVER ☐ DEEP-EN ☐ PLUG BACK ☐ DIFF RESVR ☐ Other ☐

2 NAME OF OPERATOR
DEVON ENERGY CORPORATION (NEVADA)

3 ADDRESS AND TELEPHONE NO.
20 N. BROADWAY, SUITE 1500, OKC, OK 73102-8260 (405) 235-3611

4 LOCATION OF WELL (Report location clearly and in accordance with any State requirements)*
At surface 2310' FNL & 1510' FEL
At top prod. interval reported below (SAME)
At total depth (SAME)

5 LEASE DESIGNATION AND SERIAL NO.
NM-NM-7712
6 IF INDIAN, ALLOTTEE OR TRIBE NAME
N/A
7 UNIT AGREEMENT NAME
West Red Lake 8910089700
8 FARM OR LEASE NAME, WELL NO.
West Red Lake Unit #47
9 API WELL NO.
30-015-28471
10 FIELD AND POOL, OR WILDCAT
Red Lake (Q-GB-SA)
11 SEC., T., R., M., OR BLOCK AND SURVEY OR AREA
Sec. 8-T18S-R27E
Unit G

14 PERMIT NO.
DATE ISSUED 4/13/95
12 COUNTY OR PARISH Eddy
13 STATE NM
15 DATE SPUDDED 9/24/95
16 DATE T.D. REACHED 9/30/95
17 DATE COMPL. (Ready to prod.) 10/13/95
18 ELEVATIONS (DF, RKB, RT, GR, ETC.)* GL 3475'
19 ELEV. CASINGHEAD
20 TOTAL DEPTH, MD & TVD 2250'
21 PLUG, BACK T.D., MD & TVD 2199'
22 IF MULTIPLE COMPL., HOW MANY* N/A
23 INTERVALS DRILLED BY
24 PRODUCING INTERVAL(S), OF THIS COMPLETION-TOP, BOTTOM, NAME (MD AND TVD)* 1656-2068' San Andres
25 WAS DIRECTIONAL SURVEY MADE NO
26 TYPE ELECTRIC AND OTHER LOGS RUN Dual Laterolog/MSFL, Litho-Density/Compensated Neutron and Cement Bond logs
27 WAS WELL CORED NO

28. CASING RECORD (Report all strings set in well)					
CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
8 5/8" J-55	24#	1099'	12 1/4"	350 sx Lite + 200 sx Class C	
				TOC surface	
5 1/2" J-55	15.5#	2249'	7 7/8"	140 sx Lite + 225 sx Class C	
				TOC surface	

29. LINER RECORD					30. TUBING RECORD		
SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)	SIZE	DEPTH SET (MD)	PACKER SET (MD)
					2 7/8"	2099'	

31. PERFORATION RECORD (Interval, size and number)		32. ACID SHOT, FRACTURE, CEMENT SQUEEZE, ETC.	
		DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
1656-1806' w/4 holes (.44" EHD) San Andres Alpha		1656-2068'	2500 gals 15% NeFe acid + 50 BS
1824-1843' w/4 holes (.44" EHD), San Andres "A"			61,000 gals 30# X-Link gel + 7000# 100-Mesh sd +
1887-1976' w/5 holes (.44" EHD) San Andres "B"			227,000# 16/30 Brady sd + 24,000# 16/30 RC sd
1987-2028' w/8 holes (.44" EHD), San Andres "C"			
2038-2068' w/4 holes (.44" EHD) San Andres "D"			

33.*
DATE FIRST PRODUCTION 10/15/95
PRODUCTIONS METHOD 1 (Flowing, gas lift, pumping—size and type of pump) 2 1/2" x 2" x 12' pump
WELL STATUS (Producing or shut-in) Prdg
DATE OF TEST 10/20/95
HOURS TESTED 24 hrs
CHOKE SIZE
PROD'N FOR TEST PERIOD
OIL-BBL. 41
GAS-MCF. 82
WATER-BBL. 83
GAS-OIL RATIO 2000/1
FLOW. TUBING PRESS. CASING PRESSURE CALCULATED 24-HOUR RATE OIL-BBL. 41 GAS-MCF. 82 WATER-BBL. 83 OIL GRAVITY-API (CORR.) 39

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.) sold to GPM Gas Svcs
TEST WITNESSED BY Danny Hokett

35. LIST OF ATTACHMENTS
open hole logs, deviation survey report and bond log

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records


SIGNED E. L. Buttross, Jr.

E. L. BUTTROSS, JR.
TITLE DISTRICT ENGINEER

DATE November 29, 1995

*(See Instructions and Spaces for Additional Data on Reverse Side)

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill stem tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):				38. GEOLOGIC MARKERS		
FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	TOP	
					MEAS. DEPTH	TRUE VERT. DEPTH
Premier Sand	1270'	1311	sandstone dolomite	Bowers	438'	+3001'
San Andres	1311'	2033'		Queen	683'	+2811'
				Grayburg	1043'	+2441'
				Premier	1270'	+2214'
				San Andres	1311'	+2173'
		DEPTH	ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.. (continued from the front)			
			N/A			

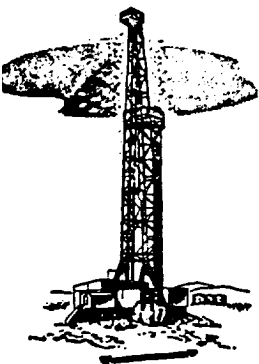

Telephone (505) 746-4405
FAX (505) 748-2205

L & M DRILLING, INC. — Oil Well Drilling Contractors

P.O. BOX 470 / ARTESIA, NEW MEXICO 88210

October 6, 1995

Devon Energy Corporation
20 North Broadway, Suite 1500
Oklahoma City, OK 73102

RE: West Red Lake Unit #47
2310' FNL & 1510' FEL
Sec. 8, T18S, R27E
Eddy County, New Mexico

Gentlemen:

The following is a Deviation Survey for the above captioned well.

DEPTH	DEVIATION
177'	3/4°
488'	1°
878'	1°
1095'	1°
1593'	1 1/4°
2095'	1 3/4°
2250'	1 1/4°

Very truly yours,

Eddie C. LaRue
Vice President

STATE OF NEW MEXICO }
COUNTY OF EDDY }

The foregoing was acknowledged before me
this 6 October 1995.

Notary Public