

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

SUBMIT IN DUPLICATE*

FORM APPROVED

CISF

(See other instructions on reverse side)

WELL COMPLETION OR RECOMPLETION REPORT AND LOG*

1a. TYPE OF WELL: OIL WELL ☒ GAS WELL ☐ DRY ☐ Other ☐b. TYPE OF COMPLETION: NEW WELL ☒ WORK OVER ☐ DEEP-EN ☐ PLUG BACK ☐ DIFF. RESVR ☐ Other ☐

2. NAME OF OPERATOR

DEVON ENERGY CORPORATION (NEVADA)

3. ADDRESS AND TELEPHONE NO.

20 N. BROADWAY, SUITE 1500, OKC, OK 73102-8260 (405) 235-3611

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements)

At surface 486' FNL & 328' FEL, Unit "A"

At top prod. interval reported below (SAME)

At total depth (SAME)

14. PERMIT NO.

DATE ISSUED

6/3/98

12. COUNTY OR PARISH

Eddy County

13. STATE

NM

15. DATE SPUDDED

11/16/98

16. DATE T.D. REACHED

11/21/98

17. DATE COMPL. (Ready to prod.)

12/10/98

18. ELEVATIONS (DF, RKB, RT, GR, ETC.)*

KB 3485'; GL 3476'; DF 3484'

19. ELEV. CASINGHEAD

20. TOTAL DEPTH, MD & TVD

2400'

21. PLUG, BACK T.D., MD & TVD

2362'

22. IF MULTIPLE COMPL., HOW MANY*

NA

23. INTERVALS

DRILLED BY

ROTARY TOOLS

x

CABLE TOOLS

24. PRODUCING INTERVAL(S), OF THIS COMPLETION—TOP, BOTTOM, NAME (MD AND TVD)*

San Andres 1637'-2060'

25. WAS DIRECTIONAL SURVEY

MADE

No

26. TYPE ELECTRIC AND OTHER LOGS RUN

LDT/CNL/DLL/MSFL/GR/CBL

27. WAS WELL CORED

No

28.

CASING RECORD (Report all strings set in well)

CASING SIZE/GRADE	WEIGHT, LB./FT.	DEPTH SET (MD)	HOLE SIZE	TOP OF CEMENT, CEMENTING RECORD	AMOUNT PULLED
8-5/8 J-55	24#	1121'	12-1/4"	surf; 350 sx lite "C", 200 sx "C"	NA
5-1/2" J-55	15.5#	2397'	7-7/8"	surf; 450 sx "C"	NA

29.

LINER RECORD

SIZE	TOP (MD)	BOTTOM (MD)	SACKS CEMENT*	SCREEN (MD)

30. TUBING RECORD

SIZE	DEPTH SET (MD)	PACKER SET (MD)
2-7/8"	1961'	

31. PERFORATION RECORD (Interval, size and number)

SAN ANDRES- ALPHA "A", "B", "C", & "D"
1637'-2060' (31-.40" EHD holes)

32. ACID SHOT, FRACTURE, CEMENT SQUEEZE, ETC.

DEPTH INTERVAL (MD)	AMOUNT AND KIND OF MATERIAL USED
1637'-2060'	2500 gals 15% NEFE
1637'-2060'	90,000 gals slick wtr prepad + 90,000 gal linear gel wtr + 3000# 100 mesh sd, 70,000# 20/40 Brady sd and 9000# CRC sd.

33.*

PRODUCTION

DATE FIRST PRODUCTION	PRODUCTIONS METHOD I (Flowing, gas lift, pumping—size and type of pump)	WELL STATUS (Producing or shut-in)
12/15/98	Pumping (2-1/2" x 2" x 16' RWTC Pump)	Producing

DATE OF TEST	HOURS TESTED	CHOKE SIZE	PROD'N FOR TEST PERIOD	OIL-BBL.	GAS-MCF.	WATER-BBL.	GAS-OIL RATIO
12/22/98	24			110	158	250	1436/1

FLOW. TUBING PRESS.	CASING PRESSURE	CALCULATED 24-HOUR RATE	OIL-BBL.	GAS-MCF.	WATER-BBL.	OIL GRAVITY-API (CORR.)
			110	158	250	39°

34. DISPOSITION OF GAS (Sold, used for fuel, vented, etc.)

Sold

35. LIST OF ATTACHMENTS

36. I hereby certify that the foregoing and attached information is complete and correct as determined from all available records

SIGNED

TONJA RUTELONIS
TITLE ENGINEERING TECHNICIAN

DATE January 6, 1999

*(See Instructions and Spaces for Additional Data on Reverse Side)

RECEIVED

JAN 11 '99

BLM
ROSWELL, NM

37. SUMMARY OF POROUS ZONES: (Show all important zones of porosity and contents thereof; cored intervals; and all drill stem, tests, including depth interval tested, cushion used, time tool open, flowing and shut-in pressures, and recoveries):				38. GEOLOGIC MARKERS		
FORMATION	TOP	BOTTOM	DESCRIPTION, CONTENTS, ETC.	NAME	MEAS. DEPTH	TRUE VERT. DEPTH
Premier Sand	1253'	1294'	sandstone	Queen	694'	
San Andres	1294'	2400'	dolomite	Grayburg	1029'	
				Premier	1253'	
				San Andres	1294'	
		DEPTH	ACID, SHOT, FRACTURE, CEMENT SQUEEZE, ETC.. (continued from the front)			

RECEIVED

JAN 11 1968

DUM
ROSWELL, NM.

L & M DRILLING, INC.

OIL WELL DRILLING CONTRACTORS
PO BOX 1370 ARTESIA, NEW MEXICO 88211-1370
(505) 746-4405 746-3518 748-2205

November 24, 1998

Devon Energy Corporation
20 North Broadway, Suite 1500
Oklahoma City, OK 73102-8260


RE: West Red Lake Unit #79
486' FNL & 328' FEL
Sec. 8, T18S, R27E
Eddy County, New Mexico

Gentlemen:

The following is a Deviation Survey for the above captioned well.

DEPTH	DEVIATION
209'	1/4°
391'	3/4°
566'	1°
743'	1°
952'	1 1/4°
1110'	1 1/2°
1587'	1 1/4°
2072'	1°
2385'	1°
2400'	1°

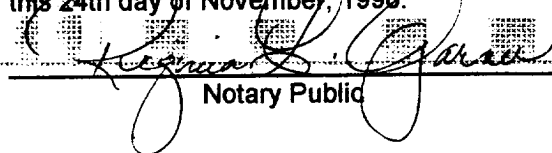
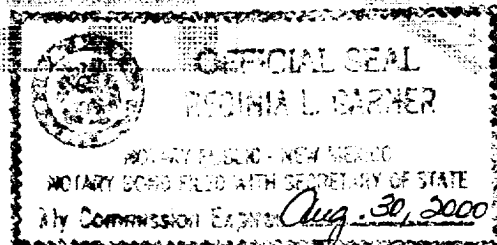
Very truly yours,



Eddie C. LaRue
Vice President

STATE OF NEW MEXICO
COUNTY OF EDDY

The foregoing was acknowledged before me
this 24th day of November, 1998.


Notary Public

RECEIVED

JAN 11 '90

BLM
ROSABELL, NM