

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED

Budget Bureau No. 1004-0135
Expires March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

DEVON ENERGY PRODUCTION COMPANY, L.P.

3. Address and Telephone No.

20 NORTH BROADWAY, SUITE 1500, OKLAHOMA CITY, OKLAHOMA 73102 (405) 235-3611

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

560' FSL & 1650' FEL, Section 4-18S-27E, Unit "O"

5. Lease Designation and Serial No.

LC-061783-A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Windfohr 4 Federal #6

9. API Well No.

30-015-30419

10. Field and Pool, or Exploratory Area

Red Lake; Glorieta-Yeso

11. County or Parish, State

Eddy County, NM

CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Spud.csg string.TD

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)


13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spud well on 11/20/00 at 2400 hrs and drld an 11" hole to 1305'. On 11/22/00 ran 28 jts 8 5/8" 24# J-55 8RD STC csg, set @ 1296'; cemented w/ 100 sx class "H" + 250 sx 35:65 C + 200 sx "C". 86 sx cmt returned to surface.

Drld 7 7/8" hole and reached TD 3800' on 11/27/00 at 2200 hrs. Schlumberger ran Platform Express Azimuthal Laterolog Micro-CFL/GR, Three Detector Litho-Density CNL/GR. Ran 88 jts 5 1/2" 15.5# J-55 LTC 8RD csg, set @ 3799'. Cemented w/ 250 sx 35:65:6 + 625 sx 50:50. 60 sx cmt returned to surface.

Released rig at 2200 hrs 11/28/00. WOCU.

RECEIVED
OCD - ARTESIA

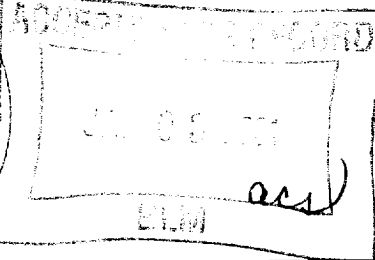

14. I hereby certify that the foregoing is true and correct

Signed

Tonja Rutelonis

Tonja Rutelonis

Title Engineering Technician

Date 12/28/00

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations to any matter within its jurisdiction.

*See Instruction on Reverse Side