

DEVON ENERGY CORPORATION

WELLBORE SCHEMATIC


WELL NAME: Windfohr 4 Federal #3			FIELD: Red Lake (Q-GB-SA)			
LOCATION: Sect 4-T18S-R27E			COUNTY: Eddy			STATE: NM
ELEVATION: GL=3588', KB 3600', DF 3599'			SPUD DATE: 11/10/00		COMP DATE: 11/24/00	
API#: 30-015-30468		PREPARED BY: Karen Cottom			DATE: 6/5/01	
TUBULARS	DEPTH	SIZE	WEIGHT	GRADE	THREAD	HOLE SIZE
CASING:	0 - 1296'	8 5/8"	24#	J-55	8rd ST&C	11"
CASING:	0 - 3795'	5 1/2"	15.5#	J-55	8RD LT&C	7 7/8"
CASING:						
CASING:						
TUBING:	0 - 2659'	2 7/8"				



CURRENT



PROPOSED

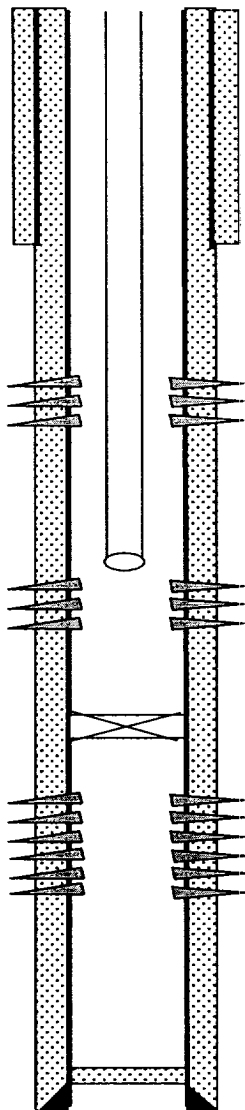

8 5/8" casing set @1,296' cmt w/100 sx Class "H" + 250 sx 35:65:6 + 200 sx "C"
55 sx to surface

Upper San Andres Perforations:
1884' - 2313' (25 holes)

2 7/8" tbg w/SN @2659'

Low San Andres Perforations:
2580' - 2736' (24 holes)

CIBP @ 2850'

Yeso Perforations:
2902' - 3240' (25 holes)

PBTD @ 3,751'
5 1/2" casing, set @3795' w/250 sx 35:65:6 + 600 sx 50:50 C. 43 sx cmt to surface
TD @ 3,800'