

N.M. OIL CONS. DIVISION  
UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
811 S. 1st St.  
Artesia, NM 88210-2834

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT-" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Mewbourne Oil Company

3. Address and Telephone No.

P. O. Box 5270, Hobbs, NM 88241 (505) 393-5905

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1150' FNL & 990' FWL of Section 8, T18S, R31E

5. Lease Designation and Serial No.  
NMNM 33437

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation  
25198

8. Well Name and No.

Fren 8 Federal Comm #1

9. API Well No.

30-015-30894

10. Field and Pool, or Exploratory Area  
Shugart, North Morrow

11. County or Parish, State

Eddy County, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent  
☒ Subsequent Report  
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☒ Other Casing Test  
☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water


(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

1/12/00: Spudded well at 8:00 am.

1/13/00: Drilled 17-1/2" hole to 638'. Ran 14 joints 13-3/8" 48# H40 casing to 638'. Cemented with 300 sacks 35:65 Pozmix cement with 0.25 lb/sack celloflakes and 2% calcium chloride followed by 200 sacks Class C cement with 2% calcium chloride. Circulated 70 sacks cement to pit. Tested casing and BOP to 500 psi.

1/22/00: Drilled 12-1/4" hole to 4503'. Ran 101 joints 8-5/8" 32# J55 and N80 casing to 4503'. Cemented with 1900 sacks 35:65 Pozmix cement with 0.25 lb/sack celloflake, 5 lbs/sack salt, and 5 lbs/sack gilsonite, followed by 200 sacks Class C cement with 2% calcium chloride. Circulated 70 sacks cement to pit. Tested casing and BOP to 1500 psi.

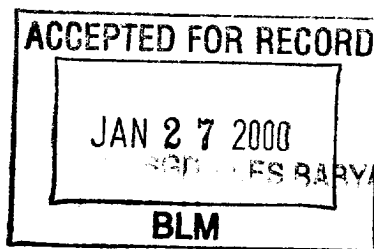

14. I hereby certify that the foregoing is true and correct

Signed [Signature]  
(This space for Federal or State office use)

Title District Manager

Date 01/24/00

Approved by \_\_\_\_\_  
Conditions of approval, if any:

Title \_\_\_\_\_

Date \_\_\_\_\_

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See Instruction on Reverse Side

RECEIVED  
JAN 26 1968  
FBI - NEW YORK

2000 JAN 26 A 10: 01

RECEIVED