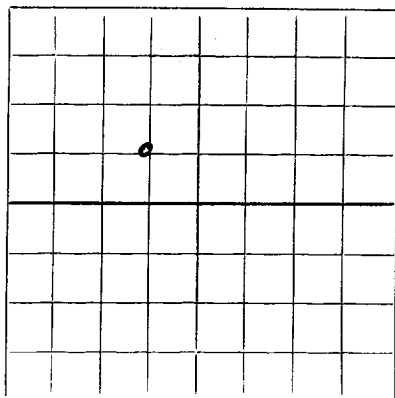


NEW MEXICO OIL CONSERVATION COMMISSION

Santa Fe, New Mexico

WELL RECORD

Mail to District Office, Oil Conservation Commission, to which Form C-101 was sent not later than twenty days after completion of well. Follow instructions in Rules and Regulations of the Commission. Submit in QUINTUPPLICATE.

AREA 640 ACRES
LOCATE WELL CORRECTLY**Robert E. McKee**

(Company or Operator)

State

(Lease)

Well No. **16**, in **SE** $\frac{1}{4}$ of **NW** $\frac{1}{4}$, of Sec. **3**, T. **19**, R. **29**, NMPM.**Turkey Track** Pool, **Eddy** County.Well is **1980** feet from **West** line and **1980** feet from **North** line of Section **3**. If State Land the Oil and Gas Lease No. is **B-8949**.Drilling Commenced **8-12-55**, 19... Drilling was Completed **9-30-**, 19**55**.Name of Drilling Contractor **Omar**Address **Box 246 Artesia, New Mexico**

Elevation above sea level at Top of Tubing Head... The information given is to be kept confidential until..., 19...

OIL SANDS OR ZONES

No. 1, from **1378** to **1388** No. 4, from... to...
No. 2, from **1467** to **1473** No. 5, from... to...
No. 3, from **2062** to **2095** No. 6, from... to...

IMPORTANT WATER SANDS

Include data on rate of water inflow and elevation to which water rose in hole.

No. 1, from **None** to... feet.
No. 2, from **None** to... feet.
No. 3, from **None** to... feet.
No. 4, from **None** to... feet.

CASING RECORD

SIZE	WEIGHT PER FOOT	NEW OR USED	AMOUNT	KIND OF SHOE	CUT AND PULLED FROM	PERFORATIONS	PURPOSE
8 5/8	24	Used	336	Regular			
7"	20	New	2068	Regular			

MUDDING AND CEMENTING RECORD

SIZE OF HOLE	SIZE OF CASING	WHERE SET	NO. SACKS OF CEMENT	METHOD USED	MUD GRAVITY	AMOUNT OF MUD USED
10"	8 5/8"	336	25	Denton		
8"	7"	2068	65	Denton		

RECORD OF PRODUCTION AND STIMULATION

(Record the Process used, No. of Qts. or Gals. used, interval treated or shot.)

Well made 7 barrels naturalResult of Production Stimulation **Pumped 85 barrels per day after Frac**Depth Cleaned Out **2095**

ORD OF DRILL-STEM AND SPECIAL TESTS

If drill-stem or other special tests or deviation surveys were made, submit report on separate sheet and attach hereto.

TOOLS USED

Rotary tools were used from.....feet to.....feet, and from.....feet to.....feet.
Cable tools were used from.....feet to.....feet, and from.....feet to.....feet.

PRODUCTION

Put to Producing....., 19.....

OIL WELL: The production during the first 24 hours was.....barrels of liquid of which.....% was
was oil;% was emulsion;% water; and.....% was sediment. A.P.I.
Gravity.....

GAS WELL: The production during the first 24 hours was.....M.C.F. plus.....barrels of
liquid Hydrocarbon. Shut in Pressure.....lbs.

Length of Time Shut in.....

PLEASE INDICATE BELOW FORMATION TOPS (IN CONFORMANCE WITH GEOGRAPHICAL SECTION OF STATE):

Southeastern New Mexico

Northwestern New Mexico

T. Anhy.....	T. Devonian.....	T. Ojo Alamo.....
T. Salt.....	T. Silurian.....	T. Kirtland-Fruitland.....
B. Salt.....	T. Montoya.....	T. Farmington.....
T. Yates.....	T. Simpson.....	T. Pictured Cliffs.....
T. 7 Rivers.....	T. McKee.....	T. Menefee.....
T. Queen.....	T. Ellenburger.....	T. Point Lookout.....
T. Grayburg.....	T. Gr. Wash.....	T. Mancos.....
T. San Andres.....	T. Granite.....	T. Dakota.....
T. Glorieta.....	T.	T. Morrison.....
T. Drinkard.....	T.	T. Penn.....
T. Tubbs.....	T.	T.
T. Abo.....	T.	T.
T. Penn.....	T.	T.
T. Miss.....	T.	T.

FORMATION RECORD

From	To	Thickness in Feet	Formation	From	To	Thickness in Feet	Formation
0	35	35	Sand	1430	1470	40	Anhy.
35	60	25	Caliche	1470	1486	16	Lime
60	115	55	Red Shale	1486	1523	37	Anhy.
115	125	10	Sand and gravel	1523	1545	22	Sand
125	135	10	Red Shale	1545	1575	30	Anhy.
135	175	40	Anhy.	1575	1589	14	Lime
175	225	50	Red Shale	1589	1605	16	Pink Lime & Anhy.
225	235	10	Grey Shale	1605	1735	130	Lime
235	255	20	Brown Shale	1735	1755	20	Brown Lime - Hard
255	285	30	Anhy.	1755	1775	20	White Lime
285	307	22	Brown Shale	1775	1845	70	Lime
307	375	68	Salt	1845	1870	25	Pink Lime
375	390	15	Red Shale	1870	1920	50	Lime
390	410	20	Anhy.	1920	1932	12	Lime - Broken
410	445	335	Salt	1932	1965	33	Lime - Hard
745	765	20	Anhy.	1965	2062	97	Lime
765	926	161	Salt	2062	2078	16	Red Sand
926	1424	498	Anhy.	2078	2095	17	Sand
1424	1430	6	Broken Sand				

ATTACH SEPARATE SHEET IF ADDITIONAL SPACE IS NEEDED

I hereby swear or affirm that the information given herewith is a complete and correct record of the well and all work done on it so far as can be determined from available records.

October 10, 1955

(Date)

Company or Operator.....

Address.....

Name.....

Position or Title.....