


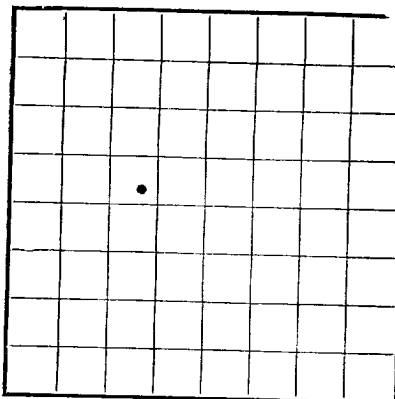

RECEIVED

JUN 26 1961

U. S. GEOLOGICAL SURVEY UNITED STATES

2510 S of W Line
1650 E of W Line

U. S. LAND OFFICE ----- **Artesia** -----
SERIAL NUMBER ----- **LC 059569 (b)** -----
LEASE OR PERMIT TO PROSPECT ----- **Lea** -----

RECEIVED
JUN 28 1961

O. C. C.
TESTESIA, OFFICE

LOG OF OIL OR GAS WELL

Company J. J. Travis Address Box 873, Midland, Texas
Lessor or Tract Kennwood Federal Field North Shugart Queen Prayburg New Mexico
Well No. 3 Sec. 21 T. 18S R. 51E Meridian _____ County Eddy

Location 2310 ft. $\left\{ \begin{array}{l} \text{N.} \\ \text{S.} \end{array} \right\}$ of N. Line and 1650 ft. $\left\{ \begin{array}{l} \text{E.} \\ \text{W.} \end{array} \right\}$ of W. Line of Sec 21 Elevation 3644.

The information given herewith is a complete and correct record of the well and all work done thereon so far as can be determined from all available records.

Signed J. J. Travis J. J. Travis.

Date June 21, 1961 Title Operator

The summary on this page is for the condition of the well at above date.

Commenced drilling May 7, 1961 Finished drilling May 22, 1961, 1961

OIL OR GAS SANDS OR ZONES

(Denote gas by G)

(Denote gas by G)

No. 1, from <u>3240</u> to <u>3262</u>	No. 4, from _____ to _____
No. 2, from _____ to _____	No. 5, from _____ to _____
No. 3, from _____ to _____	No. 6, from _____ to _____

IMPORTANT WATER SANDS

No. 1, from _____ to _____ No. 3, from _____ to _____
No. 2, from _____ to _____ No. 4, from _____ to _____

CASING RECORD

Size casing	Weight per foot	Threads per inch	Make	Amount	Kind of shoe	Cut and pulled from	Perforated		Purpose
							From—	To—	
8 5/8	24#	8	Spang	768	Baker				Surface Completion
4 1/2	9.5#	8	D. Star	3979	Baker		3240	3282	

MUDDING AND CEMENTING RECORD

Size casing	Where set	Number sacks of cement	Method used	Mud gravity	Amount of mud used
8 5/8	768	175	Pump & Plug	10.1	
4 1/2	3529	200	Pump & Plug	10.2	

PLUGS AND ADAPTERS

Heaving plug—Material ----- Length ----- Depth set -----
 Adapters—Material ----- Size -----

SHOOTING RECORD

[illegible]

TOOLS USED

Rotary tools were used from _____ feet to ~~1360~~ _____ feet, and from _____ feet to _____ feet
Cable tools were used from _____ feet to _____ feet, and from _____ feet to _____ feet

DATES

-----, 19-----	Put to producing -----, 19-----
The production for the first 24 hours was -----	barrels of fluid of which -----
emulsion; -----% water; and -----% sediment.	-----% was oil; -----%
	Gravity, °Bé. -----
If gas well, cu. ft. per 24 hours -----	Gallons gasoline per 1,000 cu. ft. of gas -----
Rock pressure, lbs. per sq. in. -----	

EMPLOYEES

Forster Drilling Co. _____, Driller _____, Driller
Odessa, Texas _____, Driller _____, Driller

FORMATION RECORD

FROM—	TO—	TOTAL FEET	FORMATION
0	700	700	Lime & Anhydrite
700	740	40	Anhydrite & salt.
740	1250	510	Anhydrite & salt
1250	2200	950	Salt & anhydrite
2200	3100	900	Lime & Dolomite
3100	3240	140	Lime & Anhydrite & Dolomite
3240	3262	22	Sand & Anhydrite
3262	3540	278	Dolomite
3540	3560	20	Sandy Anhydrite & Dolomite
Top of Queen 3223			

