

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)

Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

LC 063596

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT" for such proposals.)

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME
Barton Federal

9. WELL NO.
1

10. FIELD AND POOL, OR WILDCAT
Lusk, West Yates

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA
Sec. 22, T-19-S, R-31-E

12. COUNTY OR PARISH
Oddy

13. STATE
N. M.

1. OIL WELL ☒ GAS WELL ☐ OTHER ☐

2. NAME OF OPERATOR
Tenneco Oil Company

3. ADDRESS OF OPERATOR
P. O. Box 1031 Midland, Texas

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface
2310 FNL & 330 FEL, Sec. 22, T-19-S, R-31-E

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)
3550 OL Est.

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

X

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Proposal to abandon well and plug as follows:

Set 25 sx cmt plug 2260
Set 25 sx cmt plug stub of 5-1/2" csg.
Set 35 sx cmt plug Base of 8-1/4" csg.
Set 25 sx cmt plug stub of 8-1/4" csg.
Set 10 sx cmt plug surface

Mud laden fluid will be spotted between all plugs.

Approved subject to the following corrections and additions:
Cement plug from 2210 to 2321 (PBTB)
100' Cement plug (50' in & 50' out) over stub of 5-1/2" casing
Cement plug 730-830 (over base of 8-1/4" casing)
100' Cement plug (50' in & 50' out) over stub of 8-1/4" casing
10 sax surface plug

The 5-1/2" & 8-1/4" casing must be pulled from lowest point possible.

RECEIVED

APR 20 1966

D. C. C.
ARTESIA, OFFICE

RECEIVED

APR 13 1966
U. S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED J. F. Carnes J. F. Carnes TITLE Dist. Prod. Foreman


DATE April 11, 1966

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY

TITLE

DATE

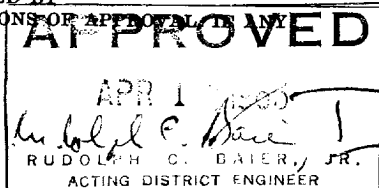

*See Instructions on Reverse Side

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.