


STATE OF NEW MEXICO
ENERGY AND MINERALS DEPARTMENT

NO. OF COPIES RECEIVED	
DISTRIBUTION	
SANTA FE	<input checked="" type="checkbox"/>
FILE	<input checked="" type="checkbox"/>
U.S.O.S.	
LAND OFFICE	
OPERATOR	<input checked="" type="checkbox"/>

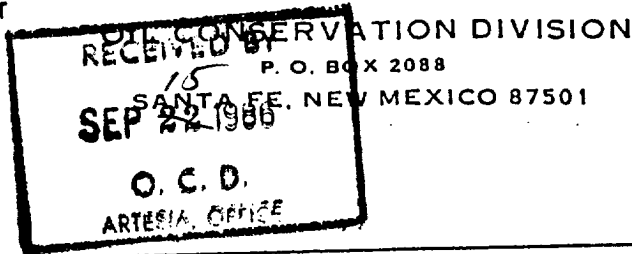

Form C-103
Revised 10-1-79

5a. Indicate Type of Lease
State Fee
5. State Oil & Gas Lease No.
L-5033

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT -" (FORM C-101) FOR SUCH PROPOSALS.)

1. OIL WELL GAS WELL OTHER
2. Name of Operator
Yates Petroleum Corporation ✓
3. Address of Operator
105 South 4th St., Artesia, NM 88210
4. Location of Well
UNIT LETTER K 1980 FEET FROM THE South LINE AND 1980 FEET FROM
THE West LINE, SECTION 11 TOWNSHIP 19S RANGE 27E NMPM.

7. Unit Agreement Name
8. Farm or Lease Name
Amoco State HE
9. Well No.
1
10. Field and Pool, or Wildcat
Undesignated 95
12. County
Eddy

15. Elevation (Show whether DF, RT, GR, etc.)
3841.2' GR

16. Check Appropriate Box To Indicate Nature of Notice, Report or Other Data
NOTICE OF INTENTION TO:
PERFORM REMEDIAL WORK PLUG AND ABANDON
TEMPORARILY ABANDON CHANGE PLANS
PULL OR ALTER CASING OTHER
SUBSEQUENT REPORT OF:
REMEDIAL WORK ALTERING CASING
COMMENCE DRILLING OPNS. PLUG AND ABANDONMENT
CASING TEST AND CEMENT JOB
OTHER Set CIBP, Perforate & Treat

17. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1703.

9-4-86. Set CIBP at 3050' w/10' cement cap. WIH and perforated 2988-2999' w/10 .42" holes as follows: 2988, 89, 90, 92, 93, 94, 96, 97, 98 and 2999'. Acidized perfs w/1000 gals 20% NEFE acid.
9-5-86. Swabbed dry.
9-9-86. Perforated 1652-1879' w/23 .42" holes as follows: 1652, 55, 91, 92, 93, 94, 95, 96, 97, 1707, 09, 1823, 24, 25, 26, 27½, 37, 38½, 40, 73, 74, 78 and 79'. Acidized perfs 1873-79' w/400 gals 15% NEFE acid. Acidized perfs 1823-40' w/1100 gals 15% NEFE acid. Acidized perfs 1691-1708' w/1250 gals 15% NEFE acid. Acidized perfs 1652-55' w/250 gals 15% NEFE acid. Attempted to frac. Screened out.
9-11-86. Acidized perfs w/2000 gals 15% acid. Sand cut perfs as follows: 2 holes @1824, 2 holes @1822, 2 holes @1696', 2 holes @1694' and 2 holes @1654'. Frac'd all perforations w/30000 gals gelled KCL water, 10000# 20/40 sand and 30000# 12/20 sand, 1000 gals acid w/ scale and corrosion chemicals.

18. I hereby certify that the information above is true and complete to the best of my knowledge and belief.
SIGNED Juanita Goodlett TITLE Production Supervisor DATE 9-12-86
Original Signed By Les A. Clements
APPROVED BY _____ TITLE _____ DATE SEP 17 1986
Supervisor District 11
CONDITIONS OF APPROVAL, IF ANY: