

Form 9-331
(May 1963)UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE
(Other instructions on re-
verse side)Form approved.
Budget Bureau No. 42-R1424.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER ☐		RECEIVED SEP 11 1980 O. C. D. ARTESIA OFFICE
2. NAME OF OPERATOR Gulf Oil Corporation ✓		
3. ADDRESS OF OPERATOR P. O. Box 670, Hobbs, NM 88240		
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface 1450' FSL & 150' FEL		
14. PERMIT NO.	15. ELEVATIONS (Show whether DF, RT, GR, etc.) 3324' GL	

5. LEASE DESIGNATION AND SERIAL NO. Sorenson - #12264
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME Lake McMillan Federal Unit
9. WELL NO. 1
10. FIELD AND POOL, OR WILDCAT Wildcat
11. SEC., T., R., S., OR BLM. AND SURVEY OR AREA ut. I
Sec 30-T19S-R27E
12. COUNTY OR PARISH Eddy
13. STATE NM

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETE

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other)

Casing

REPAIRING WELL


ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

TD 12½" hole at 2:30 A.M., 8-20-80. RU & ran 67 joints & 1 cut joint 8-5/8" 24# K-55 ST&C (2708') set at 2725'. Cement with 100 sacks shurfill, 700 sacks Class "C" w/16% gel Gulfmix & 200 sacks "C" neat. Plug down at 3 P.M., 8-20-80. Circ cement. WOC 18 hrs. Test BOP to 3000#, test casing to 2000# 30 min, ok. Drilled float, cement & shoe. Drilling formation at 3:30 A.M., 8-22-80.

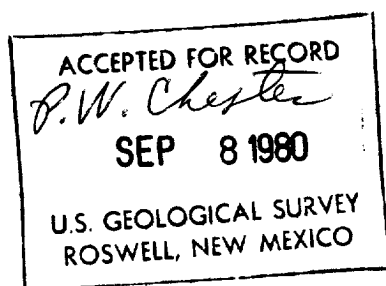

AUG 20 1980
U.S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

SIGNED

TITLE

Area Drilling Supt.

DATE

8-27-80

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY: