

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN DUPLICATE*
(Other instructions on re-
verse side)

Form approved,
Budget Bureau No. 42-R1424.
6. LEASE DESIGNATION AND SERIAL NO.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different formation.
Use "APPLICATION FOR PERMIT" for such proposals.)

NM-31198

7. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Copelan Federal

9. WELL NO.

10. FIELD AND POOL, OR WILDCAT

Penasco Draw SA-YESO

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA (Assoc.)

Sec. 5, T-19-S, R-25-E

12. COUNTY OR PARISH 13. STATE

Eddy New Mexico

1. TYPE OF WELL: ☒ OIL ☐ GAS ☐ OTHER

2. NAME OF OPERATOR

Keith Collins Petroleum Corporation/

3. ADDRESS OF OPERATOR

5505 N. Brookline, Suite 102, Oklahoma City, OK 73112

4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.
See also space 17 below.)

At surface

660' FSL & 1980' FWL of Sec. 5

14. PERMIT NO.

15. ELEVATIONS (Show whether DF, RT, GR, etc.)

3575' G.R.

16.

Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF

FRACTURE TREAT

SHOOT OR ACIDIZE

REPAIR WELL

(Other)

PULL OR ALTER CASING

MULTIPLE COMPLETION

ABANDON*

CHANGE PLANS

SUBSEQUENT REPORT OF:

WATER SHUT-OFF

FRACTURE TREATMENT

SHOOTING OR ACIDIZING

(Other) Casing Report

REPAIRING WELL

ALTERING CASING

ABANDONMENT*

(NOTE: Report results of multiple completion on Well
Completion or Recombination Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any
proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones perti-
nent to this work.) *

On June 11, 1981 reached TD of 931'.


Ran 22 joints 8-5/8" 23#/ft., J-55, ST&C casing. Casing set at 931'.

Cemented with 200 sacks Class "C" with 2% CACL₂ (1.32 cu.ft./sack yield,
14.8#/gallon weight.)

NOTE (1) Temperature survey showed TOC at 710' K.B.

(2) Ran 1" and cemented as follows: 200 sacks Class "C" with
1/4#/sack Flocele, 2% CACL₂, followed by 300 sacks Class
"C" 2% CACL₂. Pumped in 5 stages, while working 1" up
the hole.

(3) Job complete at 1:05 AM, June 12, 1981.

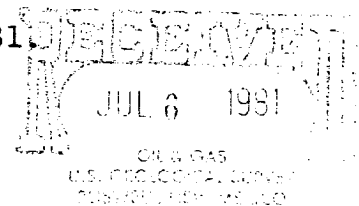

18. I hereby certify that the foregoing is true and correct

SIGNED

(This space for Federal or State use)

TITLE

DATE

APPROVED BY

CONDITIONS OF APPROVAL, IF ANY:
U.S. GEOLOGICAL SURVEY
ROSWELL, NEW MEXICO

TITLE

DATE