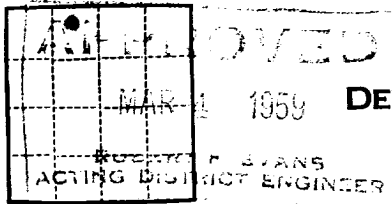


COPY TO O. C. C.

Form 9-381a
(Feb. 1951)Budget Bureau No. 42-R358.4.
Approval expires 12-31-60.

(SUBMIT IN TRIPLICATE)

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

Land Office Santa Fe
Lease No. LD-068038
Unit Coons

SUNDRY NOTICES AND REPORTS ON WELLS

NOTICE OF INTENTION TO DRILL	SUBSEQUENT REPORT OF WATER SHUT-OFF	
NOTICE OF INTENTION TO CHANGE PLANS	SUBSEQUENT REPORT OF SHOOTING OR ACIDIZING	
NOTICE OF INTENTION TO TEST WATER SHUT-OFF	SUBSEQUENT REPORT OF ALTERING CASING	
NOTICE OF INTENTION TO RE-DRILL OR REPAIR WELL	SUBSEQUENT REPORT OF RE-DRILLING OR REPAIR	
NOTICE OF INTENTION TO SHOOT OR ACIDIZE	SUBSEQUENT REPORT OF ABANDONMENT	
NOTICE OF INTENTION TO PULL OR ALTER CASING	SUPPLEMENTARY WELL HISTORY	
NOTICE OF INTENTION TO ABANDON WELL		

(INDICATE ABOVE BY CHECK MARK NATURE OF REPORT, NOTICE, OR OTHER DATA)

May 23, 1958

Well No. 2-Coons is located 330 ft. from N line and 1660 ft. from W line of sec. 3Lot 3, Sec. 3

(1/4 Sec. and Sec. No.)

21E

(Twp.)

27E

(Range)

NMPM

(Meridian)

Wilcox

(Field)

Hddy

(County or Subdivision)

New Mexico

(State or Territory)

The elevation of the derrick floor above sea level is 3196 ft. topog.

DETAILS OF WORK

(State names of and expected depths to objective sands; show sizes, weights, and lengths of proposed casings; indicate mudding jobs, cementing points, and all other important proposed work)

At a total depth of 715' in the base of the Yates lime, no fluid in the ~~and~~ Yates had been encountered and it was decided to abandon the well. Hole was plugged as follows: Filled with pit mud from bottom to 245'. Set 10-sack cement plug at 245' and pulled all casing. Filled with pit mud to 20' and with dry surface sand to top. Marker was erected over hole.

I understand that this plan of work must receive approval in writing by the Geological Survey before operations may be commenced.

Company Robert L. BunnelAddress Box 110Carlsbad, N. M.By Robert L. BunnelTitle Operator