

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TRIPLICATE*
(Other instructions on reverse side)

Form approved.
Budget Bureau No. 42-R1424.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER ☐
2. NAME OF OPERATOR **Sinclair Oil & Gas Company**
3. ADDRESS OF OPERATOR **P. O. Box 1920, Hobbs, New Mexico**
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.*
See also space 17 below.)
At surface
**1650' from South line and 1650' from West line of Section
24-21S-23E, Eddy County., New Mexico**
14. PERMIT NO. 15. ELEVATIONS (Show whether DF, RT, GR, etc.)
3785 gr

5. LEASE DESIGNATION AND SERIAL NO.
WM 07612-1
6. IF INDIAN, ALLOTTEE OR TRIBE NAME
7. UNIT AGREEMENT NAME
8. FARM OR LEASE NAME
Marathon Federal
9. WELL NO.
1
10. FIELD AND POOL, OR WILDCAT
Indian Basin
11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA
Sec. 24-T21S-22E NW PM
12. COUNTY OR PARISH
Eddy
13. STATE
New Mexico

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐

FRACTURE TREAT ☐

SHOOT OR ACIDIZE ☐

REPAIR WELL ☐

(Other) ☐

PULL OR ALTER CASING ☐

MULTIPLE COMPLETE ☐

ABANDON* ☐

CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐

FRACTURE TREATMENT ☐

SHOOTING OR ACIDIZING ☐

(Other) **Set & Cement 4-1/2" Prod. Csg.** ☒
(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

REPAIRING WELL ☐

ALTERING CASING ☐

ABANDONMENT* ☐

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

11-30-64 Run and set 9650' of 4-1/2" casing and cemented w/1175 sks. cement. (250 sks. of Increte Neat w/10% salt per. sk. and 0.8% Halid 9 slurry Wt. 11.8# and 925 sks. of Trinity Wt. 11.8#). Cement did not circulate. Temperature survey indicated top of cement @ 4632' from surface.


12-1-64 WOC 24 hrs.

12-2-64 Tested casing to 2,000# for 30 minutes. Tested O.K.

RECEIVED

DEC 10 1964

O. C. C.
ARTESIA OFFICE

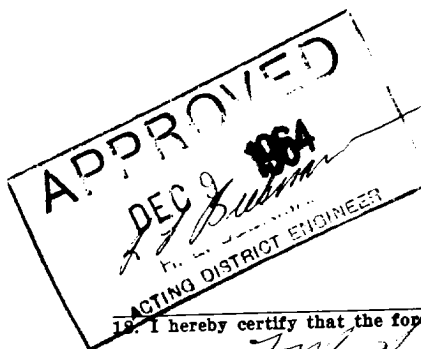

I hereby certify that the foregoing is true and correct

SIGNED

J. M. Wright

TITLE

Senior Engineer

DATE

12-4-64

(This space for Federal or State office use)

APPROVED BY

TITLE

DATE

CONDITIONS OF APPROVAL, IF ANY:

Orig: See: USGS Artesia, cc: MFS, cc: file

cc: Marathon
cc: Ralph Lowe

*See Instructions on Reverse Side

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.