

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEY

SUBMIT IN TWO COPIES
(Other instructions on reverse side)

Form approved.
Budget Bureau No. 42-R1424.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir. Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☐ OTHER ☐		5. LEASE DESIGNATION AND SERIAL NO. LC 063567	
2. NAME OF OPERATOR Harvey E. Yates		6. IF INDIAN, ALLOTTEE OR TRIBE NAME copy to 57-	
3. ADDRESS OF OPERATOR 305 Carper Bldg., Artesia, N.M.		7. UNIT AGREEMENT NAME	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface		8. FARM OR LEASE NAME H.E. Yates Federal #1 Deep	
14. PERMIT NO.		9. WELL NO. 1	
15. ELEVATIONS (Show whether DF, RT, GR, etc.)		10. FIELD AND POOL, OR WILDCAT Wildcat	
		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA 5-206-R27E	
		12. COUNTY OR PARISH Eddy	
		13. STATE N. Mex.	

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐	PULL OR ALTER CASING ☐
FRACTURE TREAT ☐	MULTIPLE COMPLETION ☐
SHOOT OR ACIDIZE ☐	ABANDON* ☐
REPAIR WELL ☐	CHANGE PLANS ☐
(Other) ☐	

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐	REPAIRING WELL ☐
FRACTURE TREATMENT ☐	ALTERING CASING ☐
SHOOTING OR ACIDIZING ☐	ABANDONMENT* ☐
(Other) Running of 5 1/2" csg.	☒

(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

We drilled this well to total depth of 10,714'. Plugged back to 8,380'.
Ran cement plug from 10,150 - 10,250; 8,820 - 8,920 and 8,430 - 8,530.
Heavy mud between each plug.
Ran 261 jts., 8,365' of 5 1/2" csg. Set at 8,380'.
Equipped w/Hovco packer shoe, B & W centralizers and rotating scratchers.
Sandblasted csg. from 8,390 - 8,050.
Csg. run as follows: 38 jts. 17# H 80 LT&C on bottom. 54 jts. 17# J-55 ST&C.
155 jts 15.50# J-55 ST&C. 12 jts. 15.50# J-55 LT&C. 2 jts. 17# H 80 on top.
Cemented w/300 sbs liner negt.
Plug down at 5:45 P.M. 4/30/64


RECEIVED
MAY 7 1964
O. C. C.
ARTESIA, OFFICE

18. I hereby certify that the foregoing is true and correct

SIGNED *R. L. Beekman* TITLE Bookkeeper DATE May 1, 1964

(This space for Federal or State office use)

APPROVED *R. L. Beekman* TITLE _____ DATE _____
CONDITIONS OF APPLICANT, IF ANY:

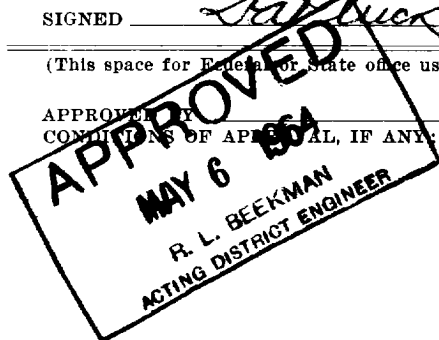

*See Instructions on Reverse Side

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.