

Form 9-331
(May 1963)UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN 1 Llicate*
(Other instructions on re-
verse side)Form approved.
Budget Bureau No. 42-R1424.

5. LEASE DESIGNATION AND SERIAL NO.

New Mexico 03499

6. IF INDIAN, ALLOTTEE OR TRIBE NAME

7. UNIT AGREEMENT NAME

8. FARM OR LEASE NAME

Federal Azotea Mesa - 8

9. WELL NO.

1

10. FIELD AND POOL, OR WILDCAT

Indian Basin Extension

11. SEC., T., R., M., OR BLK. AND
SURVEY OR AREA

Sec. 8, T22N, R24E

12. COUNTY OR PARISH

Eddy

13. STATE

N. Mex.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER ☐	
2. NAME OF OPERATOR John M. Trigg	
3. ADDRESS OF OPERATOR P. O. Box 106 - Maljamar, New Mexico	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements.* See also space 17 below.) At surface 743 Feet from North Line and 1035 Feet from West Line	
14. PERMIT NO.	15. ELEVATIONS (Show whether DF, RT, GR, etc.) 4230.2 GR 4246.2 KB

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐FRACTURE TREAT ☐SHOOT OR ACIDIZE ☐REPAIR WELL ☐(Other) ☐PULL OR ALTER CASING ☐MULTIPLE COMPLETE ☐ABANDON* ☐CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐FRACTURE TREATMENT ☐SHOOTING OR ACIDIZING ☐(Other) ☐REPAIRING WELL ☐ALTERING CASING ☐ABANDONMENT* ☐(NOTE: Report results of multiple completion on Well
Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

Spudded well at 3:00 p.m. May 21, 1963. Drilled to a total depth of 357'. Encountered no water but having trouble with boulders.

Run 360' of 13-3/8" OD 48# Spiral Weld casing on May 24, 1963. Set at 357' and cemented with 135 sacks of Inner cement with 4% gel and 2% CaCl₂. Cement did not circulate. Filled up behind casing from 90' to surface with 4 yards of ready-mix concrete. Pumped plug down at 12:00 a.m. May 25, 1963.

Blowed hole dry and drilled out with air at 1:00 p.m. May 25, 1963. Hole was dry. Drilling ahead with air.

RECEIVED

JUN 4 1965

U.S. GEOLOGICAL SURVEY
APR 27 1965

18. I hereby certify that the foregoing is true and correct

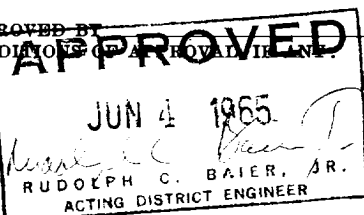
SIGNED

Kenneth E. Astor

TITLE

Production Clerk

(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL HEREIN

TITLE

DATE

*See Instructions on Reverse Side

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.