



January 2, 1997

Tubing:
379 jts 2-7/8" N-80 Butt.
Type "F" Profile Nipple
Seal Assembly
Baker "F" Pkr

Upper Morrow Perfs: (2 spf) (1976)
11,125', 27', 29', 31', 35',
37', 53', 55', 57', 59',
11,269', 71', 73', 97', 99',
11,319'


Lower Morrow Perfs: (2 spf) (1973)
11,331', 33', 35', 37', 39',
41', 43', 49'

Prepared By: Brian Singletary

GOVERNMENT R

Current Configuration
Elevation: 3,240'

1830' FSL & 1980' FWL
Sec 20, T-20-S, R-28-E
Eddy Co., NM

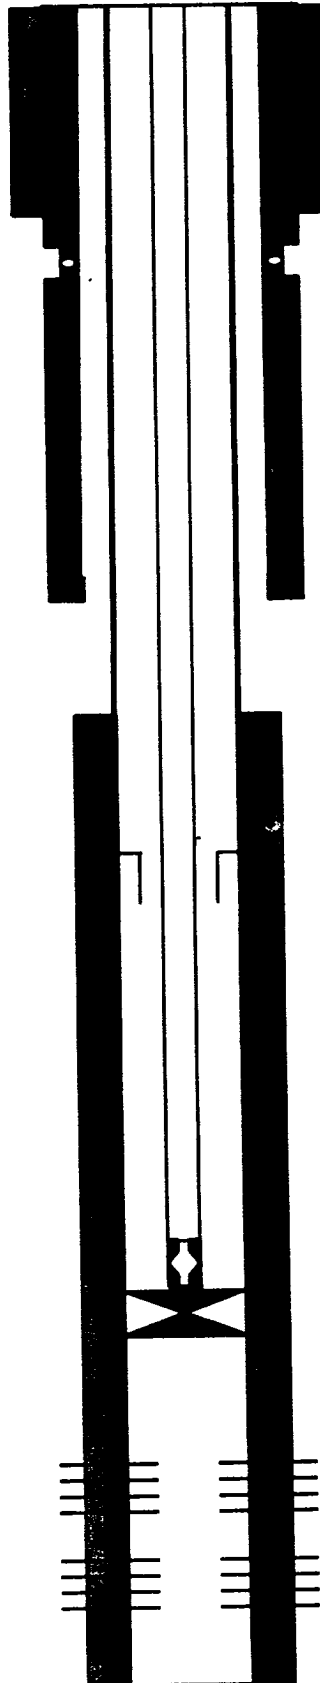

16" 65# H-40 csg
Set @ 750'
Cmt'd w/ 1050 sx, cir'd
DV Tool @ 1,206'

10-3/4" 40 & 45.5# J-55 csg
Set @ 3,114'
Cmt'd w/ 2,510 sx, circ

TOC @ 9,340'

Csg Xover @ 10,253'
17# above, 20# below

2-7/8" 6.4# N-80 Butt. tbg
Type "F" Profile Nipple
Seal Assembly
Baker "F" Pkr @ 11,067'

5-1/2" 17 & 20#, N-80, LT&C csg
Set @ 11,500'
Cmt'd w/ 950 sx
TD: 11,500'