



December 21, 1995

GOVERNMENT AC #2

Current Configuration

Elevation: GL:3255' KB: 14'

1800' FNL & 1980' FWL
Sec 13, T20S, R28E
Eddy Co., New Mexico

Tubing: (Top to Bottom)
214 jts 2-7/8", 6.5#, N-80
Seating Nipple
2-7/8" X 2-3/8" XO
Baker A-3 Loc-Set Pkr

Sqz Hole Perf: (4 spf) @ 6,672'
Sqz'd w/ 300 sx cmt

Bone Spring Perfs: (1 spf)
6,672', 77', 85', 89', 96', 6,715',
20', 29', 38', 46', 59', 67', 76', 83',
92', 98', 6,818', 25', 32', 42', 68',
74', 88', 94'


Sqz Hole Perf: (4 spf) @ 7,100'
Sqz'd w/ 250 sx cmt

Atoka Perfs: (2 spf)
10,493', 94', 95', 96', 97', 98', 99',
10,523', 24', 25', 26', 27'

Atoka Perfs: (1 spf)
10,643', 45', 47', 49', 52', 54', 56',
58', 63', 65', 67', 71', 73', 76', 83'

Morrow Perfs: (2 spf)
10,940'- 45', 11,002'- 06',
11,058'- 64', 11,134'- 36',
11,153'-56', 59'- 66', 11,201'- 03',
11,245'- 49', 55'- 58', 78'- 82'

Prepared By: Brian Singletary

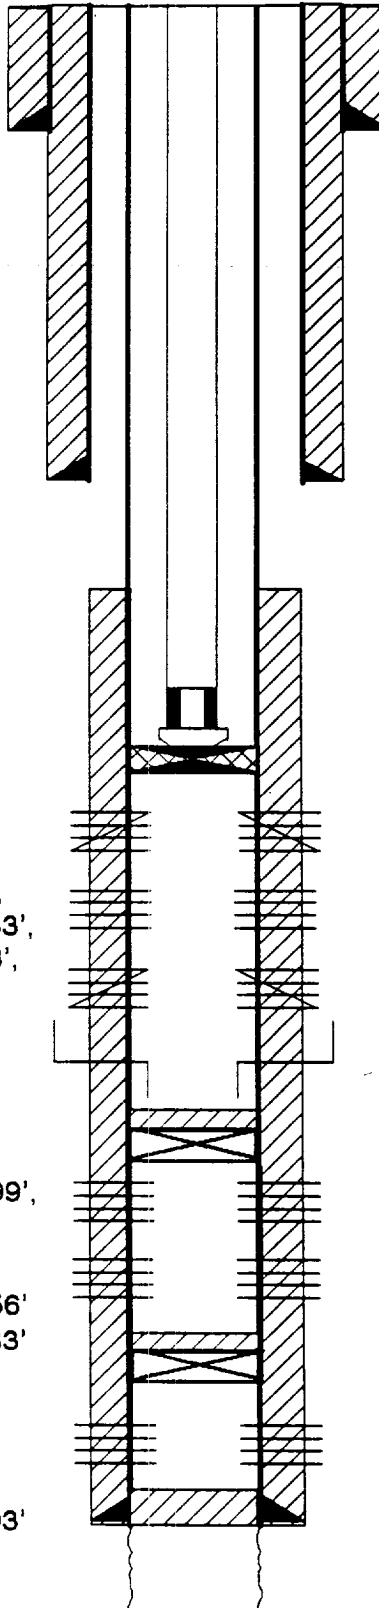

13-3/8", 48#, H-40 STC @ 900'
Cmt'd w/775 sx-circ'd

9-5/8", 36#, K-55 ST&C
Set @ 3000'
Cmt'd w/1100 sx-circ'd

TOC @ 5675' (Bond log)

Seating Nipple @ 6,548.5'
2-3/8" X 2-7/8" XO @ 6,549.6'
Baker Loc-Set pkr @ 6,550.5'

New PBTD: 7,043'

Original TOC @ 7,420'
5-1/2" Csg XO @ 10,315'
17# above & 20# below

CIBP @ 10,450' w/ 35' cmt

CIBP @ 10,900' w/ 35' cmt

5-1/2", 17 & 20#, K-55 & N-80
Set @ 11,380'
Cmt'd w/1000 sx

PBTD: 11,335'

TD: 11,610'