

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator


Mewbourne Oil Company

3. Address and Telephone No.

P.O. Box 7698, Tyler, Texas 75711 (903) 561-2900

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1980' FNL & 660' FEL Sec. 29, T20S-R27E

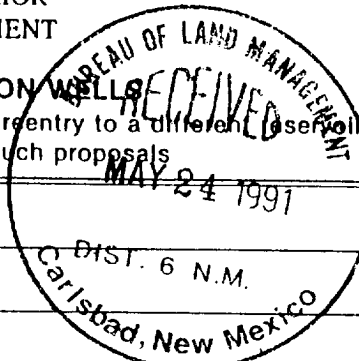

5. Lease Designation and Serial No.
NM-84711

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.
Federal "Z" Com #1

9. API Well No.
30-015-26479

10. Field and Pool, or Exploratory Area
Avalon Morrow

11. County or Parish, State
Eddy

12 CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Perf & treat

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form)

13 Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

3/25/91 - Perforated Middle Morrow 10,466-498', 32' x 33 holes, 1 SPF.

3/26/91 - Halliburton broke down perfs 10,466-498' w/4000 gals 101 acid containing 1000 SCF/Bbl N2. w/50 ball sealers. Pressured annulus to 500#. Good ball action. ISDP 4600#. 5 mins 4200#, 10 mins 4000#, 15 mins 4800#. Max 7000#. Avg 6240#.

4/03/91 - Set CIBP at 10,430' with 2 sxs cement on top of plug.

4/10/91 - Perf Middle Morrow 10,342-344', 10,393-398'. 7' x 7 holes, 1 SPF. Perf Morrow Lime Chest & Morrow Lime Sand 9956-60', 10,175-178', 10,190-199', 10,223-228', 10,241-246'. 26' x 26 holes, 1 SPF.

4/11/91 - Halliburton broke down perfs w/6000 gals Mod 101 acid containing 1000 SCF/bbl N2 carrying 55 ball sealers. Pressured annulus to 500#. ISIP 4050#. 5 mins 3650#, 10 mins 3630#, 15 mins 3620#. Max 3.5 BPM. Avg 3.4 BPM.

5/01/91 - Western frac'd perfs with 42,000 gals 73 Quality Binary Westfoam + 26,500 20/40 mesh Westprop-3 acfrac black. ISDP 5000#. 5 mins 3580#, 10 mins 3550#, 15 mins 3530#. Avg rate 13 BPM @ 8200#.

5/10/91 - Set CIBP above Morrow perfs 9956-10,398' at 9925' w/2 sxs cmt on top of plug.

14. I hereby certify that the foregoing is true and correct


Signed [Signature]

Title Engineering Operations Secretary Date 5/17/91

(This space for Federal or State office use)

Approved by _____
Conditions of approval, if any: _____

Title _____

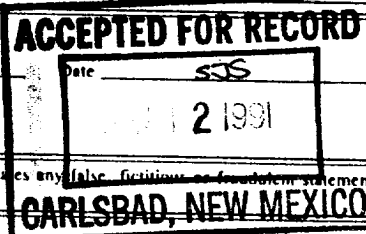

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statement or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side