

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

JUL 18 1991

O. C. D.
ARTESIA, OFFICE

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

5. Lease Designation and Serial No.
NM-15881

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.
Slinkard UR Fed. Com #4

9. API Well No.
30-015-26762

10. Field and Pool, or Exploratory Area
Undesignated Morrow

11. County or Parish, State

Eddy, NM

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

☐ Oil Well ☐ Gas Well ☒ Other

2. Name of Operator

YATES PETROLEUM CORPORATION / (505) 748-1471

3. Address and Telephone No.

105 South 4th St., Artesia, NM 88210

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

Unit C, 660' FNL & 1980' FWL, Sec. 12-T20S-R29E

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other Intermediate Casing

- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

6-28-91. Ran 76 joints 8-5/8" 32# J-55 ST&C casing set 3169'. Guide shoe set 3169', float collar set 3128'. Cemented w/200 sx "H" w/10% Thixad, 10# Gilsonite (yield 1.39, wt 14.5), and 800 sx Super "H", 10# CSE, 1/4# Celloseal (yield 2.28, wt 11.5). Tail in w/250 sx "H" + 1% CaCl2 (yield 1.32, wt 14.8). PD 5:15 PM 6-28-91. Bumped plug to 1000 psi, float held OK. Circulated 10 sacks cement. WOC. Drilled out 11:45 AM 6-29-91. WOC 18 hrs and 30 minutes. NU and tested to 1000 psi for 30 minutes. Reduced hole to 7-7/8" and resumed drilling.

14. I hereby certify that the foregoing is true and correct

Signed Jamesita Soodler

Title Production Supervisor


Date 7-11-91

(This space for Federal or State office use)

Approved by _____

Conditions of approval, if any:

Title _____

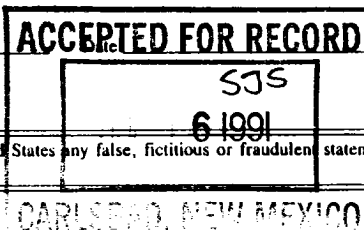

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side