

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

Oil Co
1 S. Street
Artesia, NM 87002

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

clsf

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.

Use "APPLICATION FOR PERMIT-" for such proposals

SUBMIT IN TRIPLICATE

1. Type of Well

Oil ☐ Gas ☐
☒ Well ☐ Well ☐ Other

2. Name of Operator

ARMSTRONG ENERGY CORPORATION

3. Address and Telephone No.

**P.O. Box 1973
Roswell, New Mexico 88202-1973 505-623-8726**

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

990' FNL and 2130' FWL

Sec. 22, T21S, R25E

5. Lease Designation and Serial No.

NM-029128

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Basin Fed. #1

9. API Well No.

30-015-29977

10. Field and Pool, or Exploratory Area

Catclaw Draw Delaware

11. County or Parish, State

Eddy

12. **CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA**

TYPE OF SUBMISSION

- ☒ Notice of Intent
☐ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☒ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☐ OTHER


- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Propose to plug and abandon this well:

1. Cap existing CIBP located at 2265' with 35' of cement.
2. Set CIBP at 1810' to cover existing perfs from 1898' to 2074'. Circulate hole with salt gel mud. Cap CIBP with cement up to 1710' which would cover 8 5/8" casing shoe with cement 50' above and below. 8 5/8" casing shoe is at 1760'.
3. Set 50' cement plug at surface.
4. Erect marker.
5. Remediate location and road per BLM requirements.

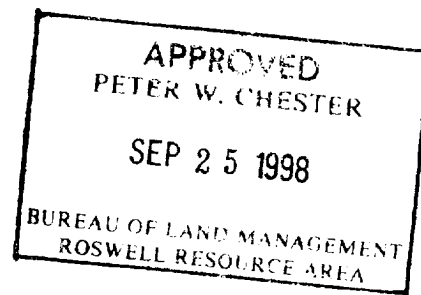

14. I hereby certify that the foregoing is true and correct

Signed

Title **Consultant**

Date **09-15-98**

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any:

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

* See Instruction on Reverse Side