

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

BLM Oil & Gas Division  
11 S. 1st Street  
Artesia, NM 88210-2834

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

CISF

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

**SUBMIT IN TRIPLICATE**

5. Lease Designation and Serial No.

NM-12241-A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Little Box Canyon AOX Fed #2

9. API Well No.

30-015-30222

10. Field and Pool, or Exploratory Area

Little Box Canyon Morrow

11. County or Parish, State

Eddy Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent  
☒ Subsequent Report  
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☒ Other Intermediate casing & cement  
☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

TD 1995'. Reached TD at 10:00 PM 7-30-98. Ran 45 joints of 8-5/8" 24# J-55 (1999.06') of casing set at 1995'. 1-Texas Pattern notched guide shoe set at 1995'. Float collar set at 1951'. Cemented with 200 sacks Class H, 10% A-10B, 10#/sack gilsonite, 1/4#/sack celloflake and 1% CaCl<sub>2</sub> (yield 1.52, weight 14.6) and 700 sacks "C" (65-35-6), 1/4#/sack celloflake and 5#/sack salt (Yield 2.00, weight 12.56). Tailed in with 200 sacks Class C and 2% CaCl<sub>2</sub> (yield 1.34, weight 14.8). PD 7:30 AM 7-31-98. Bumped plug to 650 psi, OK. Cement did not circulate. WOC 4 hours. Ran Temperature Survey and found top of cement at 900'. Ran 1". Tagged cement at 1046'. Spotted 50 sacks Class C with 4% CaCl<sub>2</sub>. PD 1:45 PM 7-31-98. WOC 3 hours. Ran 1". Tagged cement at 954'. Spotted 50 sacks Class C with 4% CaCl<sub>2</sub>. PD 5:00 PM 7-31-98. WOC 1-1/4 hour. Ran 1". Tagged cement at 954'. Spotted 35 sacks Class C with 4% CaCl<sub>2</sub>. PD 6:30 PM 7-31-98. WOC 1-1/4 hour. Ran 1". Tagged cement at 880'. Spotted 100 sacks Class C with 4% CaCl<sub>2</sub>. PD 8:00 PM 7-31-98. WOC 1 hour. Ran 1". Tagged cement at 816'. Spotted 50 sacks Class C with 4% CaCl<sub>2</sub>. PD 9:15 PM 7-31-98. WOC 3 hours. Ran 1". Tagged cement at 588'. Spotted 250 sacks Class C with 4% CaCl<sub>2</sub>. PD 12:30 AM 8-1-98. Circulated 10 sacks to pit. WOC. Nippled up and tested to 3000 psi for 15 minutes, OK. Drilled out at 5:30 PM 8-2-98. WOC 58 hours. Reduced hole to 7-7/8". Resumed drilling.

14. I hereby certify that the foregoing is true and correct

Signed

Title Operations Technician

Date August 4, 1998


(This space for Federal or State office use)

Approved by  
Conditions of approval, if any:

Title

Date

(ORIG. SGD.) GARY GOURLEY

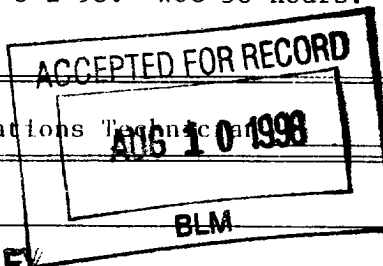

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See Instruction on Reverse Side