

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT-" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well  
☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

Nadel and Gussman Permian, L.L.C.

OGRID# 155615

3. Address and Telephone No.

601 N. Marienfeld, Suite 508, Midland, TX 79701

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1800' FSL & 840' FWL, unit letter L

Sec. 31 - T20S - R27E

5. Lease Designation and Serial No.

NM- 0400512A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

27324

8. Well Name and No.

ICA 31 Fed No. 1

9. API Well No.

30-015-31587

10. Field and Pool, or Exploratory Area

Avalon Morrow

11. County or Parish, State

Eddy Co., NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

☐ Notice of Intent

☒ Subsequent Report

☐ Final Abandonment Notice

TYPE OF ACTION

☐ Abandonment

☐ Recompletion

☐ Plugging Back

☐ Casing Repair

☐ Altering Casing

☐ Other

☐ Change of Plans

☒ New Construction

☐ Non-Routine Fracturing

☐ Water Shut-Off

☐ Conversion to Injection

☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*


Notice of spudding and setting surface casing:

03-19-01: MIRU Patterson Rig #143. Notified BLM of approximate spud time.

03-20-01: Spud 17½" hole at 7:00 PM MST on 3-19-01. Drilled to 400'. Circulated hole clean and LD DP.

03-21-01: RU Bull Rogers and RIH with 9 joints new 13 3/8", 48#, J55 casing and set at 400'.  
RU BJ and cement with 440 sx class C with 2% CaCl, ¼#/ sk cellophane flakes.  
Circulated 29 sx to reserve pit. Joe Lara with the BLM witnessed the casing running and cementing.  
Jetted pits, cut off 13 3/8", welded on A section and NU BOP's. WOC.

03-22-01: Picked up 11" bit, bit sub and BHA. TIH, tagged up and drilled the cement and float equipment.  
Resumed drilling 11" hole.

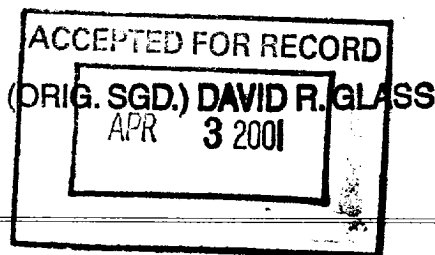

14. I hereby certify that the foregoing is true and correct

Signed

Title R. McNaughton - Operations Engineer

Date 03/22/01

(This space for Federal or State office use)

Approved by

Title

Date

Conditions of approval, if any: