

UNITED STATES
DEPARTMENT OF THE INTERIOR
GEOLOGICAL SURVEYSUBMIT IN TRIPLICATE*
(Other instructions on re-
verse side)Form approved.
Budget Bureau No. 42-R1424.

SUNDRY NOTICES AND REPORTS ON WELLS

(Do not use this form for proposals to drill or to deepen or plug back to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals.)

1. OIL WELL ☐ GAS WELL ☒ OTHER ☐		5. LEASE DESIGNATION AND SERIAL NO. WM 0544986	
2. NAME OF OPERATOR Skelly Oil Company		6. IF INDIAN, ALLOTTEE OR TRIBE NAME -----	
3. ADDRESS OF OPERATOR P. O. Box 1351, Midland, Texas 79701		7. UNIT AGREEMENT NAME -----	
4. LOCATION OF WELL (Report location clearly and in accordance with any State requirements. See also space 17 below.) At surface Unit Letter F, 1980' FWL & 1970' FWL, Sec. 25-23S-31E		8. FARM OR LEASE NAME Todd 25 Federal	
14. PERMIT NO.		9. WELL NO. 1-Z	
15. ELEVATIONS (Show whether DF, RT, GR, etc.) 3497' KB		10. FIELD AND POOL, OR WILDCAT Sand Dunes Pool	
		11. SEC., T., R., M., OR BLK. AND SURVEY OR AREA Sec. 25-23S-31E	
		12. COUNTY OR PARISH Eddy	
		13. STATE New Mexico	

16. Check Appropriate Box To Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

TEST WATER SHUT-OFF ☐FRACTURE TREAT ☐SHOOT OR ACIDIZE ☐REPAIR WELL ☐(Other) ☐PULL OR ALTER CASING ☐MULTIPLE COMPLETE ☐ABANDON* ☐CHANGE PLANS ☐

SUBSEQUENT REPORT OF:

WATER SHUT-OFF ☐FRACTURE TREATMENT ☐SHOOTING OR ACIDIZING ☐(Other) ☐REPAIRING WELL ☐ALTERING CASING ☐ABANDONMENT* ☒**Set 7-5/8" OD casing**
(NOTE: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

17. DESCRIBE PROPOSED OR COMPLETED OPERATIONS (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

- 1) Reamed 7-7/8" hole to 9-1/2" hole to 4630'.
- 2) Drilled new hole 4630-12,700'.
- 3) Ran Compensated Neutron Formation Density Log 0-12,700', Dual Laterolog and BHC GR Sonic Log 4430-12,700'.
- 4) Set 289 joints (12,678') 7-5/8" OD casing at 12,700'.
- 5) Cemented with 2200 sacks lightweight cement, 300 sacks Class "H" cement, Haled 22, 3# gilsonite, 3# salt, and 1/4# floccale. WOC 48 hours.
- 6) Tested 7-5/8" OD casing to 3800# pressure for one hour, held okay.
- 7) Resumed drilling.

RECEIVED

NOV - 6 1974

U. S. GEOLOGICAL SURVEY
ARTESIA, NEW MEXICO

18. I hereby certify that the foregoing is true and correct

(Signed) **D. R. Crow** **D. R. Crow** TITLE **Lead Clerk**DATE **11-5-74**


(This space for Federal or State office use)

APPROVED BY
CONDITIONS OF APPROVAL, IF ANY:

TITLE

DATE

*See Instructions on Reverse Side

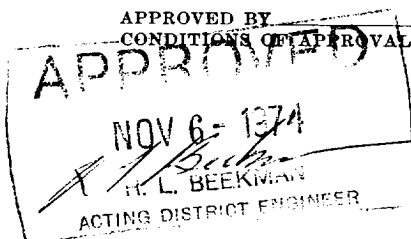

Instructions

General: This form is designed for submitting proposals to perform certain well operations, and reports of such operations when completed, as indicated, on Federal and Indian lands pursuant to applicable Federal law and regulations, and, if approved or accepted by any State, on all lands in such State, pursuant to applicable State law and regulations. Any necessary special instructions concerning the use of this form and the number of copies to be submitted, particularly with regard to local, area, or regional procedures and practices, either are shown below or will be issued by, or may be obtained from, the local Federal and/or State office.

Item 4: If there are no applicable State requirements, locations on Federal or Indian land should be described in accordance with Federal requirements. Consult local State or Federal office for specific instructions.

Item 17: Proposals to abandon a well and subsequent reports of abandonment should include such special information as is required by local Federal and/or State offices. In addition, such proposals and reports should include reasons for the abandonment; data on any former or present productive zones, or other zones with present significant fluid contents not sealed off by cement or otherwise; depths (top and bottom) and method of placement of cement plugs; mud or other material placed below, between and above plugs; amount, size, method of parting of any casing, liner or tubing pulled and the depth to top of any left in the hole; method of closing top of well; and date well site conditioned for final inspection looking to approval of the abandonment.