

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
Budget Bureau No. 1004-0135
Expires: March 31, 1993

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.
Use "APPLICATION FOR PERMIT—" for such proposals

SUBMIT IN TRIPLICATE

RECEIVED

AUG 0 2 1991

**O. C. D.
ARTESIA, OFFICE**

5. Lease Designation and Serial No.

NM-43556

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Unocal-HPC Fed. #1

9. API Well No.

30-015-26774

10. Field and Pool, or Exploratory Area

Livingston Ridge Del.

11. County or Parish, State

Eddy, N.M.

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

HANAGAN PETROLEUM CORPORATION

3. Address and Telephone No.

P.O. Box 1737 Roswell, N.M. 88202 (505) 623-5053

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

1650' FNL & 1980' FEL, Sec. 1-T22S-R31E

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent
☒ Subsequent Report
☐ Final Abandonment Notice

TYPE OF ACTION

- ☐ Abandonment
☐ Recompletion
☐ Plugging Back
☐ Casing Repair
☐ Altering Casing
☒ Other **PRODUCTION CASING**
- ☐ Change of Plans
☐ New Construction
☐ Non-Routine Fracturing
☐ Water Shut-Off
☐ Conversion to Injection
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)*

7/22/91- TD @ 8461'. Ran 198 jts. of 5½" casing as follows: 1629' 17# J-55 LT&C, 6004' 15.5# J-55 LT&C, 837' 17# J-55 LT&C. Cemented as follows: STAGE I-300 sx class "H" w/2% gel, ½ of 1% Halad 322, 5# salt/sx, ½# flocele/sx, 5# gilsonite/sx. PD @ 2:15 A.M. 7/24/91. Circulated 80 sx cement to pits. Circulate thru DV tool 6' between stages. DV tool @ 7467'. STAGE II-675 sx Hall-Lite w/½# flocele/sx mixed at 12.4#/gl tailed in w/300 sx "H" w/2% gel, ½ of 1% Halad 322, 5# salt/sx, ½# flocele/sx, 5# gilsonite/sx. Did not circulate cement to surface but did circulate some Superflush 102 to pits indicating that cement is well above the required 4,000'. PD @ 10:15 P.M. 7/24/91

14. I hereby certify that the foregoing is true and correct

Signed [Signature]


Title **Asst. Vice President**

Date **7/29/91**

(This space for Federal or State office use)

Approved by _____
Conditions of approval, if any:

Title _____

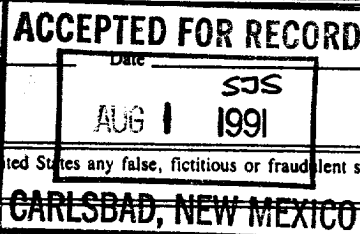

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*See Instruction on Reverse Side