

RECEIVED

JUN - 6 '94

Form 3160-5  
(June 1990)

RECEIVED

FEB 23 11 20 AM 1993

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENTO. C. D.  
ARTESIA, OFFICEFORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

## SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT—" for such proposals

5. Lease Designation and Serial No.

NM-0281482-A

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Mobil Federal No. 4

9. API Well No.

30 015 27114

10. Field and Pool, or Exploratory Area

Sand Dunes West (Delaware)

11. Country or Parish, State

Eddy County, New Mexico

SUBMIT IN TRIPLICATE

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Pogo Producing Company

3. Address and Telephone No.

P. O. Box 10340 Midland TX 79702-7340

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

330' FNL and 660' FEL of Section 29, T-23-S, R-31-E

CONFIDENTIAL

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

## TYPE OF SUBMISSION


- ☐
- Notice of Intent
- 
- ☐
- Subsequent Report
- 
- ☐
- Final Abandonment Notice

## TYPE OF ACTION

- ☐
- Abandonment
- 
- ☐
- Recompletion
- 
- ☐
- Plugging Back
- 
- ☐
- Casing Repair
- 
- ☐
- Altering Casing
- 
- ☒
- Other
- Set Intermediate Csg.
- 
- ☐
- Change of Plans
- 
- ☐
- New Construction
- 
- ☐
- Non-Routine Fracturing
- 
- ☐
- Water Shut-Off
- 
- ☐
- Conversion to Injection
- 
- ☐
- Dispose Water

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

Drilled 11" hole from 550' to 4010'. TD reached 0830 hrs CST 1/14/93. Ran 98 jts 8-5/8" 24# and 32# J-55 ST&C. Guide shoe @ 4010'. Float collar @ 3964'. Howco cemented casing with 1400 sx Halliburton Lite + 5#/sk salt @ 12.7 ppg followed by 200 sx Premium Plus + 5#/sx salt @ 14.8 ppg. Plug down with 1500 psi 2400 hrs CST 1/14/93. Recovered 175 sx excess cement. WOC 24 hrs. NU BOP's and test casing and BOP's to 1500 psi.

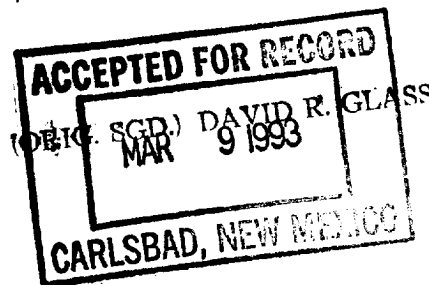

14. I hereby certify that the foregoing is true and correct

Signed Richard L. WrightTitle Div. Operations ManagerDate 2/22/93

(This space for Federal or State office use)

Approved by \_\_\_\_\_  
Conditions of approval, if any: \_\_\_\_\_

Title \_\_\_\_\_

Date \_\_\_\_\_

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See Instruction on Reverse Side