

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT  
Oil Company Division  
311 S. 1st Street  
Artesia, NM 88210-2834

FORM APPROVED  
Budget Bureau No. 1004-0135  
Expires: March 31, 1993

C/SF

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT-" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well  
☐ Oil Well ☒ Gas Well ☐ Other

2. Name of Operator  
Mewbourne Oil Company

3. Address and Telephone No.  
P. O. Box 5270, Hobbs, NM 88241 (505) 393-5905

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)  
1980' FSL & 660' FEL of Section 18, T23S, R27E

5. Lease Designation and Serial No.  
NM-0275360

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.  
Ranch Hand "18" Fed Com #1

9. API Well No.  
30-015-30699

10. Field and Pool, or Exploratory Area  
Carlsbad, South Morrow

11. County or Parish, State  
Eddy

12. CHECK APPROPRIATE BOX(S) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent  
☒ Subsequent Report  
☐ Final Abandonment Notice

TYPE OF ACTION


- ☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Altering Casing  
☐ Other \_\_\_\_\_
- ☐ Change of Plans  
☒ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)

12/18/99: Drilled 8-3/4" hole to 12,120'. Ran laterolog and density logs.

12/20/99: Set 282 joints 5-1/2" 17# N80 & J395 casing to 12,120'. Ran DV tool at 8780'. Cemented lower interval with 1160 sacks Super H cement with 5#/sack gilsonite and 1.4% fluid loss additive. Cemented upper interval with 2010 sacks Class H light cement with 6% gel, 1/4 lb/sack Flocele, and 0.3% fluid loss additive, followed by 100 sacks Class H neat cement. Tested casing to 4400 psi. Released rig

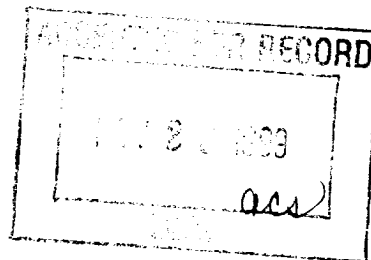

14. I hereby certify that the foregoing is true and correct

Signed [Signature]  
(This space for Federal or State office use)

Title District Manager

Date 11/22/99

Approved by  
Conditions of approval, if any:

Title

Date

Title 18 U.S.C. Section 1001, makes it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

\*See Instruction on Reverse Side