

UNITED STATES  
DEPARTMENT OF THE INTERIOR  
BUREAU OF LAND MANAGEMENT

N.M. Oil & Gas Division  
811 S. 1st Street  
Artesia, NM 88210-2834

FORM APPROVED  
Bureau No. 1004-0135  
Expires: March 31, 1993

c/s f

**SUNDRY NOTICES AND REPORTS ON WELLS**

Do not use this form for proposals to drill or to deepen or reentry to a different reservoir.  
Use "APPLICATION FOR PERMIT-" for such proposals

**SUBMIT IN TRIPLICATE**

1. Type of Well

☒ Oil Well ☐ Gas Well ☐ Other

2. Name of Operator

Pogo Producing Company

3. Address and Telephone No.

P. O. Box 10340, Midland, TX 79702-7340 (915)685-8100

4. Location of Well (Footage, Sec., T., R., M., or Survey Description)

330' FSL & 660' FWL, Section 35, T23S, R31E

5. Lease Designation and Serial No.  
NM-19199

6. If Indian, Allottee or Tribe Name

7. If Unit or CA, Agreement Designation

8. Well Name and No.

Calmon #12

9. API Well No.

30-015-31645

10. Field and Pool, or Exploratory Area

Sand Dunes Delaware West

11. County or Parish, State

Eddy County, NM

12. CHECK APPROPRIATE BOX(s) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION

- ☐ Notice of Intent  
☒ Subsequent Report  
☐ Final Abandonment Notice


TYPE OF ACTION

- ☐ Abandonment  
☐ Recompletion  
☐ Plugging Back  
☐ Casing Repair  
☐ Atering Casing  
☒ Other Spud, Set Surface Casing  
☐ Change of Plans  
☐ New Construction  
☐ Non-Routine Fracturing  
☐ Water Shut-Off  
☐ Conversion to Injection  
☐ Dispose Water

(Note: Report results of multiple completion on Well Completion or Recompletion Report and Log form.)

13. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work. If well is directionally drilled, give subsurface locations and measured and true vertical depths for all markers and zones pertinent to this work.)\*

Spud & Set Surface Csg - MIRU TMBR/Sharp #23. Spud well @ 2300 hrs 03/29/01. Drld 14-3/4" hole to 760'. TD reached @ 1815 hrs 03/30/01. Ran 20 jts 10-3/4" 32.75# J-55 ST&C csg. TPGS @ 760'. BJ cmt'd w/ 250 sks 35:65 @ 12.8 ppg followed by 200 sks CI "C" + 2% CaCl2 @ 14.8 ppg. Plug down @ 2400 hrs 03/30/01. Circ 60 sks to surface. WOC 24 hrs. Make cut-off. Weld on WH. NU BOP's & test to 1000# ok.

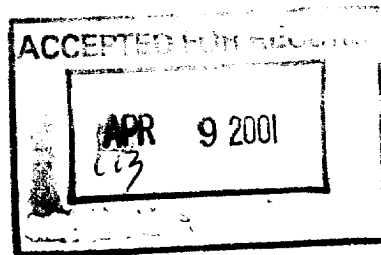

14. I hereby certify that the foregoing is true and correct

Signed Cathy Embert

Title Operation Tech

Date 04/03/01

(This space for Federal or State office use)

Approved by

Conditions of approval, if any:

Title

Date

RECEIVED

APR 05 '01

BLM  
C. SWELL, NM